

# accessman

MAKING HEIGHT EASY

product guide



A large, dark, stylized letter 'A' logo is centered in the background. It is composed of several concentric shapes, including a large outer 'A' and a smaller inner 'A', creating a layered effect. The logo is set against a dark blue background with a subtle, repeating pattern of the same 'A' shape.

0800 2GET HIGH

[www.accessman.co.nz](http://www.accessman.co.nz)

# Contents

MAST LIFTS.....	7
-----------------	---

ELECTRIC SCISSOR LIFTS .....	11
------------------------------	----

3-4 Metre Electric Scissor Lifts	12
----------------------------------	----

4 Metre Push Around Electric Scissor Lift	13
---	----

6 Metre Electric Scissor Lifts	14
--------------------------------	----

8 Metre Electric Scissor Lifts	16
--------------------------------	----

10 Metre Electric Scissor Lifts	19
---------------------------------	----

12 Metre Electric Scissor Lifts	20
---------------------------------	----

14 Metre Electric Scissor Lifts	21
---------------------------------	----



ROUGH TERRAIN SCISSOR LIFTS.....	23
----------------------------------	----

6 Metre Rough Terrain Scissor Lifts	24
-------------------------------------	----

8 Metre Rough Terrain Scissor Lifts	25
-------------------------------------	----


9 Metre Rough Terrain Scissor Lifts	27
-------------------------------------	----

10 Metre Rough Terrain Scissor Lifts	28
--------------------------------------	----

12 Metre Rough Terrain Scissor Lifts	31
--------------------------------------	----

18 Metre Rough Terrain Scissor Lifts	33
--------------------------------------	----

20 Metre Rough Terrain Scissor Lifts	35
--------------------------------------	----



CHERRY PICKERS .....	37
----------------------	----

12 Metre Cherry Pickers	38
-------------------------	----

13 Metre Cherry Pickers	40
-------------------------	----

16 Metre Cherry Pickers	42
-------------------------	----

17 Metre Cherry Pickers	44
-------------------------	----




# Contents continued....




## NUCKLEBOOMS 47

12 Metre Knucklebooms	48
15 Metre Knucklebooms	54
16 Metre Knucklebooms	60
17 Metre Knucklebooms	64
18 Metre Knucklebooms	66
20-21 Metre Knucklebooms	70
21 Metre Knucklebooms	78
26 Metre Knucklebooms	80
28 Metre Knucklebooms	82
32 Metre Knucklebooms	84
41 Metre Knucklebooms	86



## TELESCOPIC BOOMS.....89

23 Metre Telescopic Booms	90
---------------------------	----



## SPECIALISED MACHINERY .....92

Transport Truck	92
Traccess170 Spider Lift	94
Mini Crawler Crane	96



## TELEHANDLERS .....99

## TRAINING .....102

## COFFEE CAR ..... 104



# Vision Statement

The fundamental basis of the Accessman Brand is that of a company based on integrity, product reliability and service second to none – a true kiwi success story. These principles remain today with our continued growth across all regions.

My vision as Group General Manager extends to a number of core focuses for the near future including the further development of our franchise system to meet the continued demand for our brand representation across New Zealand, the release of the latest safety features available internationally to reinforce our commitment to the Health & Safety of our hirers, and a commitment to providing long term employment opportunities for our staff – commonly referred to as “The A Team”.

Our ability to not only maintain our presence but strengthen it, comes with the knowledge that timing is everything. The foresight to meet the market and diversify when required, provides clients the reassurance that Accessman will always deliver. Success is about creating benefit for all & enjoying the process.

- LENA HARRINGTON, GROUP GENERAL MANAGER



*The Accessman Group now has a fleet in excess of over 1200 machines, making Accessman one of the largest specialised access hire companies in New Zealand.*

## LOCAL KNOWLEDGE MAKES A DIFFERENCE

All Accessman branches are run by local experts from each region, they know the environments and conditions in which their customers need to work so they can provide advice specific to each situation.

## QUALITY MACHINES + CUSTOMER FOCUSED APPROACH = GROWTH

The secret to the success of Accessman hinges on providing customers with good quality machines; that are well maintained and serviced regularly, coupled with a customer-focused approach.


## INDUSTRY EXPERTS

Accessman has played an advisory role to the Hire Industry Association of NZ (HIANZ) for the purpose of developing the Codes of Practice for the operation of elevated work platforms (EWPs).

## ACCESSMAN ACCREDITED TRAINING FACILITY

Accessman takes safety so seriously that they have their own accredited training centres offering EWP operator training from the International Powered Access Federation (IPAF) and HIANZ. For further information on any of our training courses IPAF or Silvercard, please email [training@accessman.co.nz](mailto:training@accessman.co.nz) or alternatively visit our website [www.accessman.co.nz](http://www.accessman.co.nz)

# Which machine is for me?

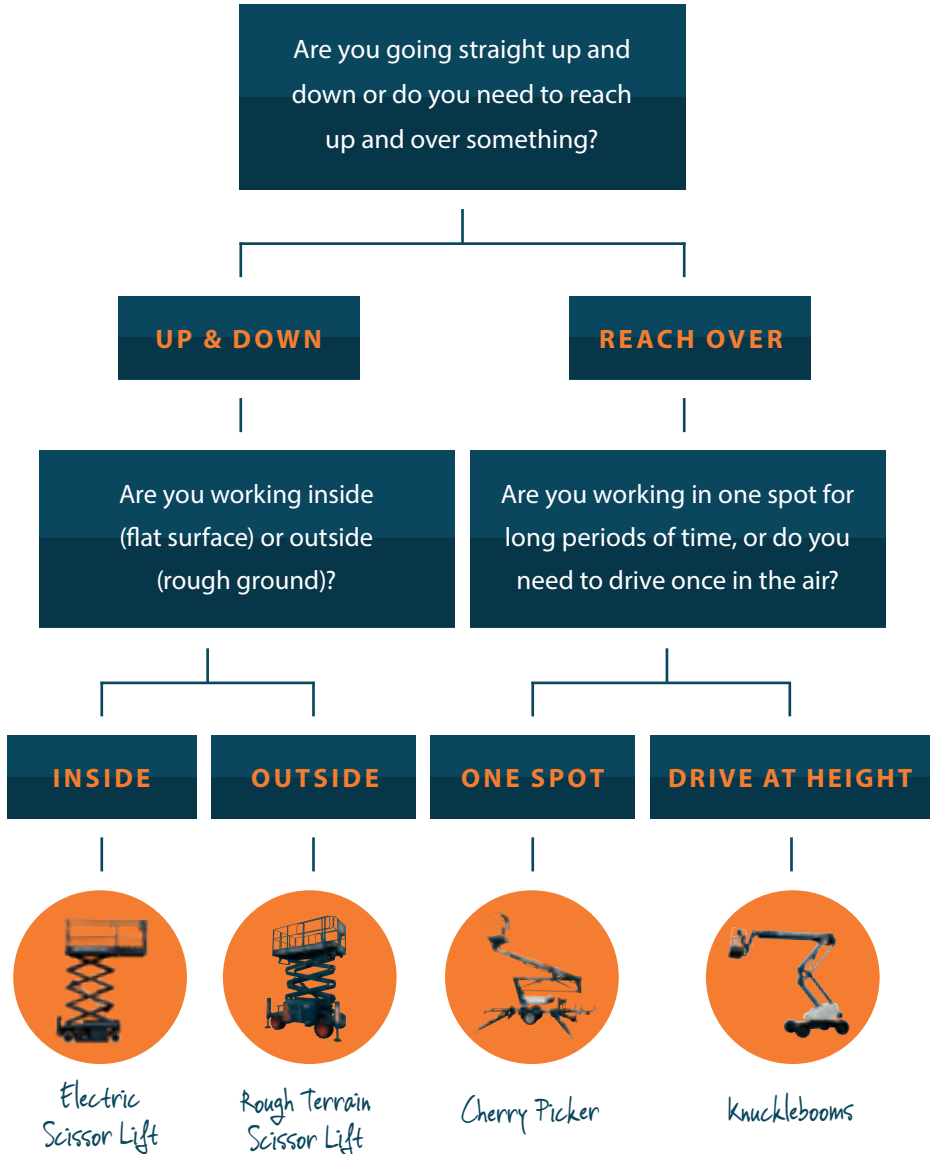



accessman

MAKING HEIGHT EASY



40

accessman

891

accessman

106

accessman

800

accessman

accessman

0800 2 GET HIGH



# If you need to do a one man job...

The perfect machine for one-man jobs! These narrow machines are suited to indoor tasks that require only one operator in the basket for the purpose of going up and down.

They are battery powered keeping noise to a minimum, while ensuring that there are no diesel fumes. **Non-marking tyres** are standard to minimise the possibility of damage to indoor floor coverings, while a tight turning circle makes these machines incredibly manoeuvrable.

Vertical Personnel Lifts are available in various sizes. Certain models are compact and can be towed behind a suitable vehicle. For those that can't be towed, Accessman will deliver to and collect from your job site.

*Machine availability and specifications do vary between regions. Please contact your local branch for more information.*



Vertical Lifts

	DINGLI MV075 RS "RIZER"	DINGLI MV075 E "RIZER"	DINGLI MVP080-E
WORKING HEIGHT	9.50m	9.50m	10.00m
PLATFORM HEIGHT	7.50m	7.50m	8.0m
PLATFORM SIZE	780 x 700mm	780 x 700mm	690 x 600mm
PLATFORM CAPACITY	125kg	125kg	150kg
OVERALL HEIGHT STOWED	1990mm	1980mm	1990mm
OVERALL WIDTH	760mm	820mm	730mm
OVERALL LENGTH	1410mm	1400mm	1370mm
GROSS WEIGHT	1162kg	1232kg/880kg	450kg
WIND RATING	No	No	No
FUEL	Battery	Battery	Battery/Push Around

## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.





	HAULOTTE STAR 10	DINGLI MV-095J "RAPTOR"
WORKING HEIGHT	10.00m <i>(3m horizontal reach)</i>	11.20m <i>(3m horizontal reach)</i>
PLATFORM HEIGHT	8.0m	9.20m
PLATFORM SIZE	780 x 980mm	870 x 620mm
PLATFORM CAPACITY	200kg	200kg
OVERALL HEIGHT STOWED	1990mm	1990mm
OVERALL WIDTH	1.0m	1.0m
OVERALL LENGTH	2770mm	2720mm
GROSS WEIGHT	2677kg	2950kg
WIND RATING	Yes	Yes
FUEL	Battery	Battery

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER.

#### TRANSPORT REQ.



Mast Lifts

STAR 10  
RAPTOR MJ095J



# If you need to work indoors at height...

If you need to work indoors at height, an Electric Scissor Lift is the machine for you.

They are compact to enable you to access tight areas or to manoeuvre between aisles and around other machinery, while battery power ensures there are no diesel fumes and minimal noise. They have a tight turning circle and **non-marking tyres** which minimises the possibility of damage to indoor floor coverings.

Electric Scissor Lifts are available in 3-metre, 4-metre, 6-metre, 8-metre, 10-metre, 12-metre and 14-metre varieties;



providing height access for a range of situations. Additional versatility is provided via varying deck width options plus a roll-out deck extension that provides extra reach over objects.

*Machine availability and specifications do vary between regions. Please contact your local branch for more information.*

Electric Scissor Lifts

# 3-4 Metre Electric Scissor Lift

S03E  
S036-RS

12

	DINGLI S03E	DINGLI S036-RS
WORKING HEIGHT	5.00m	5.60m
PLATFORM HEIGHT	3.00m	3.60m
PLATFORM SIZE	1150 x 700mm	1290 x 700mm
PLATFORM CAPACITY	240kg	240kg
PLATFORM LENGTH (EXTENDED)	1850mm	1890mm
EXTENSION CAPACITY	100kg	100kg
OVERALL HEIGHT	1860mm	2030mm
OVERALL HEIGHT STOWED	No fold down rails	1670mm
OVERALL WIDTH	760mm	760mm
OVERALL LENGTH	1300mm	1440mm
GROSS WEIGHT	554kg	880kg
WIND RATING	Yes	Yes
FUEL	Battery	Battery

**NOTE:** S036-RS IS WIND-RATED FOR 2 PEOPLE INDOORS AND 1 PERSON OUTDOORS

## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



	GMG 1530-ED	DINGLI SP039-E PUSH AROUND
WORKING HEIGHT	6.50m	5.80m
PLATFORM HEIGHT	4.50m	3.80m
PLATFORM SIZE	1280 x 760mm	1280 x 700mm
PLATFORM CAPACITY	240kg	240kg
PLATFORM LENGTH (EXTENDED)	1800mm	NA
EXTENSION CAPACITY	100kg	NA
OVERALL HEIGHT	2030mm	1920mm
OVERALL HEIGHT STOWED	1590mm	1560mm
OVERALL WIDTH	760mm	760mm
OVERALL LENGTH	1690mm	1440mm
GROSS WEIGHT	860kg	425/530kg
WIND RATING	No	No
FUEL	Battery	Battery/Push Around


**NOTE:** GMG MACHINES HAVE OPTIONAL HEIGHT SENSORS

## SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



SP039-E  
PUSH AROUND  
1530-ED



	GMG 1930-ED	HAULOTTE 8.1 N OPTIMUM
WORKING HEIGHT	7.60m	7.77m
PLATFORM HEIGHT	5.70m	5.77m
PLATFORM SIZE	1640 x 740mm	1720 x 740mm
TOTAL PLATFORM CAPACITY	230kg	230kg
PLATFORM LENGTH (EXTENDED)	2550mm	2590mm
EXTENSION CAPACITY	115kg	
OVERALL HEIGHT	2160mm	
OVERALL HEIGHT STOWED	1790mm	1980mm
OVERALL WIDTH	760mm	790mm
OVERALL LENGTH	1820mm	1900mm
GROSS WEIGHT	1430kg	1590kg
WIND RATING	Yes	Yes
FUEL	Battery	Battery

**NOTE:** GMG MACHINES HAVE OPTIONAL HEIGHT SENSORS


## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



GMG 1930-ED



HAULOTTE 8.1 N OPTIMUM



	MEC1932	SNORKEL S1930	DINGLI S06-E
WORKING HEIGHT	7.79m	7.80m	7.80m
PLATFORM HEIGHT	5.79m	5.80m	5.80m
PLATFORM SIZE	1680 x 800mm	1630 x 740mm	1670 x 740mm
TOTAL PLATFORM CAPACITY	227kg	227kg	230kg
PLATFORM LENGTH (EXTENDED)	2590mm	2476mm	2570mm
EXTENSION CAPACITY	113kg	113kg	113kg
OVERALL HEIGHT	2030mm	2010mm	2180mm
OVERALL HEIGHT STOWED	1890mm	No fold down rails	1840mm
OVERALL WIDTH	800mm	760mm	760mm
OVERALL LENGTH	1880mm	1680mm	1860mm
GROSS WEIGHT	1388kg	1379kg	1415kg
WIND RATING	Yes	Yes	Yes
FUEL	Battery	Battery	Battery

#### SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



## 6 Metre Electric Scissor Lifts

MEC1932  
S1930  
S06-E

	GMG 2632-ED SKINNY	MEC2633 SKINNY
WORKING HEIGHT	9.80m	9.92m
PLATFORM HEIGHT	8.00m	7.92m
PLATFORM SIZE	2250 x 800mm	2310 x 840mm
TOTAL PLATFORM CAPACITY	227kg	227kg
PLATFORM LENGTH (EXTENDED)	3240mm	3380mm
EXTENSION CAPACITY	113kg	113kg
OVERALL HEIGHT	2290mm	2190mm
OVERALL HEIGHT STOWED	1800mm	2m
OVERALL WIDTH	800mm	840mm
OVERALL LENGTH	2450mm	2490mm
GROSS WEIGHT	2205kg	2109kg
WIND RATING	No	No
FUEL	Battery	Battery

**NOTE:** GMG MACHINES HAVE OPTIONAL HEIGHT SENSORS



## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



	MEC2647	DINGLI S0808E SKINNY
WORKING HEIGHT	9.92m	10.00m
PLATFORM HEIGHT	7.92m	8.00m
PLATFORM SIZE	2310 x 1190mm	2270 x 810mm
TOTAL PLATFORM CAPACITY	454kg	230kg
PLATFORM LENGTH (EXTENDED)	3390mm	3170mm
EXTENSION CAPACITY	113kg	113kg
OVERALL HEIGHT	2250mm	2320mm
OVERALL HEIGHT STOWED	1780mm	1890mm
OVERALL WIDTH	1190mm	810mm
OVERALL LENGTH	2510mm	2480mm
GROSS WEIGHT	2404kg	2180kg
WIND RATING	Yes	No
FUEL	Battery	Battery

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



	DINGLI S0812E	HAULOTTE COMPACT 10N.1
WORKING HEIGHT	10.00m	10.00m
PLATFORM HEIGHT	8.00m	8.00m
PLATFORM SIZE	2270 x 1120mm	2300 x 810mm
TOTAL PLATFORM CAPACITY	450kg	230kg
PLATFORM LENGTH (EXTENDED)	3170mm	3220mm
EXTENSION CAPACITY	113kg	120kg
OVERALL HEIGHT	2320mm	2180mm
OVERALL HEIGHT STOWED	1780mm	1320mm
OVERALL WIDTH	1150mm	810mm
OVERALL LENGTH	2480mm	2490mm
GROSS WEIGHT	2655kg	2190kg
WIND RATING	Yes	Yes
FUEL	Battery	Battery

## SAFETY REQ.



\*

## TRANSPORT REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER



	MEC3247	DINGLI S1012E
WORKING HEIGHT	11.75m	12.00m
PLATFORM HEIGHT	9.75m	10.00m
PLATFORM SIZE	2130 x 1190mm	2270 x 1120mm
TOTAL PLATFORM CAPACITY	318kg	320kg
PLATFORM LENGTH (EXTENDED)	3390mm	3170mm
EXTENSION CAPACITY	113kg	113kg
OVERALL HEIGHT	2420mm	2440mm
OVERALL HEIGHT STOWED	1940mm	1920mm
OVERALL WIDTH	1190mm	1150mm
OVERALL LENGTH	2510mm	2480mm
GROSS WEIGHT	2717kg	2695kg
WIND RATING	Yes	Yes
FUEL	Battery	Battery

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



# 12 Metre Electric Scissor Lifts

S1212E  
4046-ED

20

	DINGLI S1212E	GMG 4046-ED
WORKING HEIGHT	13.8m	14.04m
PLATFORM HEIGHT	11.8m	12.04m
PLATFORM SIZE	2270 x 1120mm	2310 x 1150mm
TOTAL PLATFORM CAPACITY	320kg	350kg
PLATFORM LENGTH (EXTENDED)	3170mm	3320mm
EXTENSION CAPACITY	113kg	120kg
OVERALL HEIGHT	2580mm	2520mm
OVERALL HEIGHT STOWED	2040mm	1960mm
OVERALL WIDTH	1150mm	1150mm
OVERALL LENGTH	2480mm	2460mm
GROSS WEIGHT	2910kg	3400kg
WIND RATING	No	No
FUEL	Battery	Battery

**NOTE:** GMG MACHINES HAVE RAMP CONTROL AND OPTIONAL HEIGHT SENSORS


## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.





	DINGLI S1412E
WORKING HEIGHT	15.70m
PLATFORM HEIGHT	13.70m
PLATFORM SIZE	2640 x 1200mm
TOTAL PLATFORM CAPACITY	200kg
PLATFORM LENGTH (EXTENDED)	3540mm
EXTENSION CAPACITY	113kg
OVERALL HEIGHT	2580mm
OVERALL HEIGHT STOWED	2260mm
OVERALL WIDTH	1250mm
OVERALL LENGTH	2840mm
GROSS WEIGHT	3150kg
WIND RATING	No
FUEL	Battery

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



## 14 Metre Electric Scissor Lifts

S1412E



# If you need to work outdoors at height...

This machine is ideally suited to outdoor work; where uneven surfaces require additional stabilisation or where 4WD access is necessary; however with adequate ventilation they can also be used indoors. Electric rough terrains are also available. An articulating rear axle and hydraulic stabilizers on each corner of the machine provides a level working platform regardless of the terrain; while varying deck width options plus a roll-out deck extension ensures sufficient capacity for multiple workers and tools.

Rough Terrain Scissor Lifts are available in 8-metre, 9-metre, 10-metre, 12-metre, 18-metre and 20-metre varieties. Some



models have an option of **non-marking tyres**.

This machine can not be towed with a car, so Accessman will deliver and pick-up your Rough Terrain Scissor Lift, to and from your job site.

*Machine availability and specifications do vary between regions. Please contact your local branch for more information.*

# 6 Metre Rough Terrain Scissor Lifts

SR2255

24

	SNORKEL SR2255
WORKING HEIGHT	8.50m
PLATFORM HEIGHT	6.50m
PLATFORM SIZE	2730 x 1400mm
TOTAL PLATFORM CAPACITY	420kg
PLATFORM LENGTH (EXTENDED)	3930mm
EXTENSION CAPACITY	120kg
OVERALL HEIGHT	2460mm
OVERALL HEIGHT STOWED	1550mm
OVERALL WIDTH	1450mm
OVERALL LENGTH	3300mm
GROSS WEIGHT	2360kg
FUEL	Diesel

## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.





	DINGLI SC0817AWD	HAULOTTE 10DX
WORKING HEIGHT	10.00m	10.28m
PLATFORM HEIGHT	8.00m	8.28m
PLATFORM SIZE	2510 x 1550mm	2500 x 1450mm
TOTAL PLATFORM CAPACITY	567kg	565kg
PLATFORM LENGTH (EXTENDED)	3960mm	3700mm
EXTENSION CAPACITY	136kg	150kg
OVERALL HEIGHT	2320mm	2440mm
OVERALL HEIGHT STOWED	1700mm	1590mm
OVERALL WIDTH	1730mm	1780mm
OVERALL LENGTH	3380mm	3170mm
GROSS WEIGHT	3580kg	3350kg
FUEL	Diesel	Diesel

#### SAFETY REQ.



\*

#### TRANSPORT REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER



8 Metre Rough Terrain Scissor Lifts

SC0817AWD  
10DX

25

	SNORKEL SRT2770
WORKING HEIGHT	10.28m
PLATFORM HEIGHT	8.28m
PLATFORM SIZE	2730 x 1650mm
TOTAL PLATFORM CAPACITY	580kg
PLATFORM LENGTH (EXTENDED)	3930mm
EXTENSION CAPACITY	120kg
OVERALL HEIGHT	2530mm
OVERALL HEIGHT STOWED	1750mm
OVERALL WIDTH	1770mm
OVERALL LENGTH	3360mm
GROSS WEIGHT	2886kg
FUEL	Diesel

## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



SNORKEL SRT2770





	MEC 3084 RT SELF-LEVELLING SIGMA	MEC 3084 ES SELF-LEVELLING SIGMA
WORKING HEIGHT	11.00m	11.00m
PLATFORM HEIGHT	9.00m	9.00m
PLATFORM SIZE	4270 x 1830mm	4270 x 1830mm
TOTAL PLATFORM CAPACITY	680kg	680kg
OVERALL HEIGHT	2670mm	2670mm
OVERALL HEIGHT STOWED	1780mm	1780mm
OVERALL WIDTH	2130mm	2130mm
OVERALL LENGTH	4400mm	4400mm
GRADEABILITY	45% / 24.2°	40% / 22°
GROSS WEIGHT	3400kg	3675kg
FUEL	Diesel	Battery

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



MEC 3084 SELF-LEVELLING SIGMA



9 Metre Rough Terrain Scissor Lifts

3084 SELF  
LEVELLING  
SIGMA

# 10 Metre Rough Terrain Scissor Lifts

SC1017 AWD  
SC1018 AWD

28

	DINGLI SC1017 AWD	DINGLI SC1018 AWD
WORKING HEIGHT	12.00m	12.00m
PLATFORM HEIGHT	10.00m	10.00m
PLATFORM SIZE	2510 x 1550mm	2880 x 1520mm
TOTAL PLATFORM CAPACITY	454kg	454kg
PLATFORM LENGTH (EXTENDED)	3940mm	4310mm
EXTENSION CAPACITY	136kg	136kg
OVERALL HEIGHT	2500mm	2590mm
OVERALL HEIGHT STOWED	1900mm	1820mm
OVERALL WIDTH	1730mm	1760mm
OVERALL LENGTH	3300mm	3840mm
GROSS WEIGHT	3850kg	4300kg
FUEL	Diesel	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

## SAFETY REQ.



\*

## TRANSPORT REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER



DINGLI SC1017 AWD



DINGLI SC1018 AWD

	HAULOTTE 12DX	SNORKEL SR3370
WORKING HEIGHT	12.06m	12.12m
PLATFORM HEIGHT	10.06m	10.12m
PLATFORM SIZE	2500 x 1540mm	2730 x 1650mm
TOTAL PLATFORM CAPACITY	450kg	450kg
PLATFORM LENGTH (EXTENDED)	3700mm	3930mm
EXTENSION CAPACITY	150kg	120kg
OVERALL HEIGHT	2550mm	2700mm
OVERALL HEIGHT STOWED	1700mm	2000mm
OVERALL WIDTH	1800mm	1770mm
OVERALL LENGTH	3170mm	3360mm
GROSS WEIGHT	4060kg	3620kg
FUEL	Diesel	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



	MEC3772 ES	MEC3772 RT
WORKING HEIGHT	13.28m	13.28m
PLATFORM HEIGHT	11.28m	11.28m
PLATFORM SIZE	2790 x 1830mm	2790 x 1520mm
TOTAL PLATFORM CAPACITY	454kg	340kg
PLATFORM LENGTH (EXTENDED)	4010mm	4010mm
EXTENSION CAPACITY	181kg	181kg
OVERALL HEIGHT	2710mm	2620mm
OVERALL HEIGHT STOWED	1950mm	1880mm
OVERALL WIDTH	1830mm	1830mm
OVERALL LENGTH	2980mm	2980mm
GROSS WEIGHT	3717kg	3589kg
FUEL	Battery	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

## SAFETY REQ.



\*

\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



MEC3772

	DINGLI SC1217 AWD	DINGLI SC1218 AWD
WORKING HEIGHT	14.0m	14.3m
PLATFORM HEIGHT	12.0m	12.3m
PLATFORM SIZE	2510 x 1550mm	2880 x 1520mm
TOTAL PLATFORM CAPACITY	345kg	363kg
PLATFORM LENGTH (EXTENDED)	3940mm	4310mm
EXTENSION CAPACITY	136kg	136kg
OVERALL HEIGHT	2630mm	2740mm
OVERALL HEIGHT STOWED	2030mm	1970mm
OVERALL WIDTH	1730mm	1760mm
OVERALL LENGTH	3300mm	3840mm
GROSS WEIGHT	4050kg	5050kg
FUEL	Diesel	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



12 Metre Rough Terrain Scissor Lifts

SC1217 AWD  
SC1218 AWD

	MEC4069	MEC4191
WORKING HEIGHT	14.20m	14.50m
PLATFORM HEIGHT	12.20m	12.50m
PLATFORM SIZE	3000 x 1500mm	3550 x 1800mm
TOTAL PLATFORM CAPACITY	360kg	454kg
PLATFORM LENGTH (EXTENDED)	4220mm	4570mm
EXTENSION CAPACITY	113kg	227kg
OVERALL HEIGHT	2550mm	3020mm
OVERALL HEIGHT STOWED	1980mm	2220mm
OVERALL WIDTH	1750mm	2310mm
OVERALL LENGTH	3200mm	3660mm
GROSS WEIGHT	4900kg	4670kg
FUEL	Diesel	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

## SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.





	HAULOTTE H18 SX	DINGLI SL1623 AWD
WORKING HEIGHT	18.00m	18.00m
PLATFORM HEIGHT	16.00m	16.00m
MAXIMUM DRIVE HEIGHT	10.00m	9.00m
PLATFORM SIZE	4000 x 1890mm	3980 x 1830mm
TOTAL PLATFORM CAPACITY	500kg	680kg
PLATFORM LENGTH (BOTH ENDS EXTENDED)	6000mm	6570mm
EXTENSION CAPACITY	227kg	227kg
OVERALL HEIGHT	2970mm	3190mm
OVERALL HEIGHT STOWED	2110mm	2490mm
OVERALL WIDTH	2250mm	2270mm
OVERALL LENGTH	4180mm	4880mm
GROSS WEIGHT	7300kg	9190kg
FUEL	Diesel	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



18 Metre Rough Terrain Scissor Lifts

H18 SX  
SL1623 AWD

	MEC 5492RT
WORKING HEIGHT	18.50m
PLATFORM HEIGHT	16.50m
MAXIMUM DRIVE HEIGHT	10.70m
PLATFORM SIZE	5300 x 1930mm
TOTAL PLATFORM CAPACITY	680kg
PLATFORM LENGTH (BOTH ENDS EXTENDED)	7540mm
EXTENSION CAPACITY	227kg
OVERALL HEIGHT	3150mm
OVERALL HEIGHT STOWED	2380mm
OVERALL WIDTH	2340mm
OVERALL LENGTH	5300mm
GROSS WEIGHT	8850kg
FUEL	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

## SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

## TRANSPORT REQ.



	MEC 6092RT
WORKING HEIGHT	20.20m
PLATFORM HEIGHT	18.20m
MAXIMUM DRIVE HEIGHT	12.20m
PLATFORM SIZE	5230 x 1900mm
TOTAL PLATFORM CAPACITY	540kg
PLATFORM LENGTH (EXTENDED)	7540mm
EXTENSION CAPACITY	227kg
OVERALL HEIGHT	3150mm
OVERALL HEIGHT STOWED	2380mm
OVERALL WIDTH	1900mm
OVERALL LENGTH	5300mm
GROSS WEIGHT	9300kg
FUEL	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION

#### SAFETY REQ.



\* HARNESS IF REQUIRED BY SITE/EMPLOYER

#### TRANSPORT REQ.



20 Metre Rough Terrain Scissor Lifts

6092RT



PHOTO CRÉDIT: FULL BLAST CONTRACTING



# If you need to work indoors or outdoors...

With unrivalled telescopic reach and bi-fuel capacity (both battery and petrol power options), Cherry Pickers are suitable for both indoor and outdoor jobs. They are versatile and able to access tight areas and are almost silent when operated by battery. Hydraulic stabilizers on each corner of the machine provides a level working platform regardless of the terrain while in-basket controls give workers full control to manoeuvre the working platform to where it is needed.

Accessman will provide you with a free harness to wear while working in the basket of the Cherry Picker as per national Health & Safety requirements.



Cherry Pickers are available for hire with a 12-metre, 13-metre, 16-metre and 17-metre reach. Your Cherry Picker can be delivered or you can tow the machine with a suitable vehicle.

*Machine availability and specifications do vary between regions. Please contact your local branch for more information.*

Cherry Pickers


	NIFTY 120T
WORKING HEIGHT	12.20m
PLATFORM HEIGHT	10.20m
PLATFORM SIZE	1100 x 650mm
PLATFORM CAPACITY	200kg
WORKING OUTREACH	6.10m
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	1900mm
OVERALL WIDTH (OUTRIGGERS RETRACTED)	1500mm*
OVERALL WIDTH (OUTRIGGERS EXTENDED)	3550mm
OVERALL LENGTH STOWED	4500mm
GROSS WEIGHT	1400kg
FUEL - BI-ENERGY	Battery/Petrol

\* THIS MACHINE HAS THE ABILITY TO BE MADE NARROWER TO BE ABLE TO GET THROUGH TIGHTER GAPS. WIDTH 1100MM WITH AXLES RETRACTED.





## NIFTY 120T

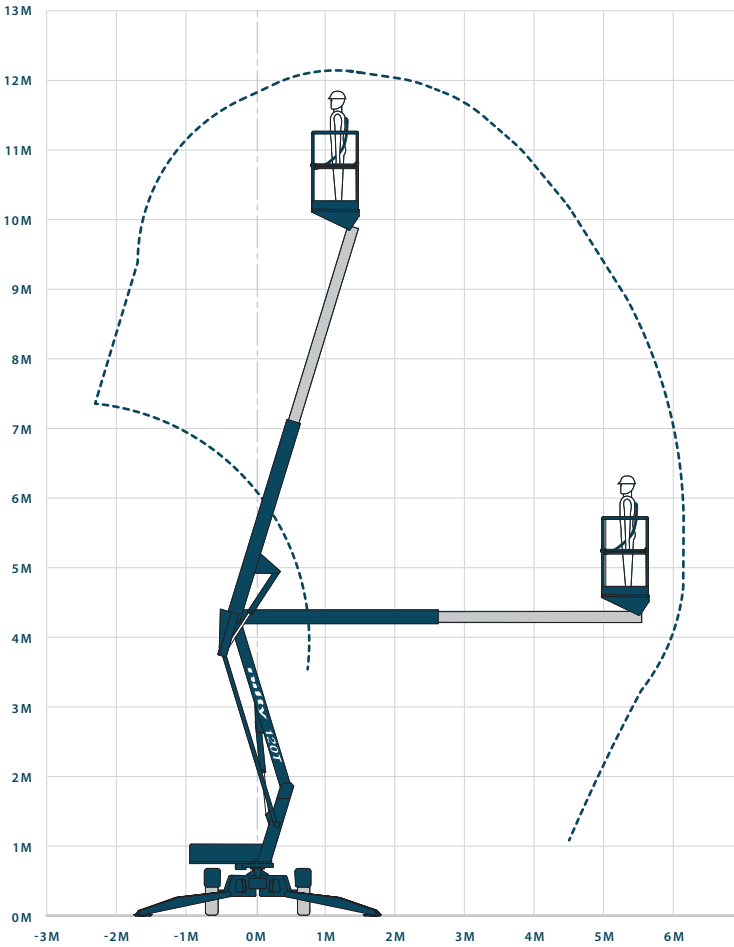

### SAFETY REQ.



### TRANSPORT REQ.



12 Metre Cherry Pickers


120T

39

	HAULOTTE HTA13P
WORKING HEIGHT	13.30m
PLATFORM HEIGHT	11.30m
PLATFORM SIZE	1220 x 760mm
PLATFORM CAPACITY	227kg
WORKING OUTREACH	6900mm
ROTATION SLEW	700° (non-continuous)
OVERALL HEIGHT STOWED	1950mm
OVERALL WIDTH (OUTRIGGERS RETRACTED)	1660mm
OVERALL WIDTH (OUTRIGGERS EXTENDED)	3000mm
OVERALL LENGTH STOWED	4950mm
GROSS WEIGHT	1542kg
FUEL	Battery/Petrol



## HAULOTTE HTA13P

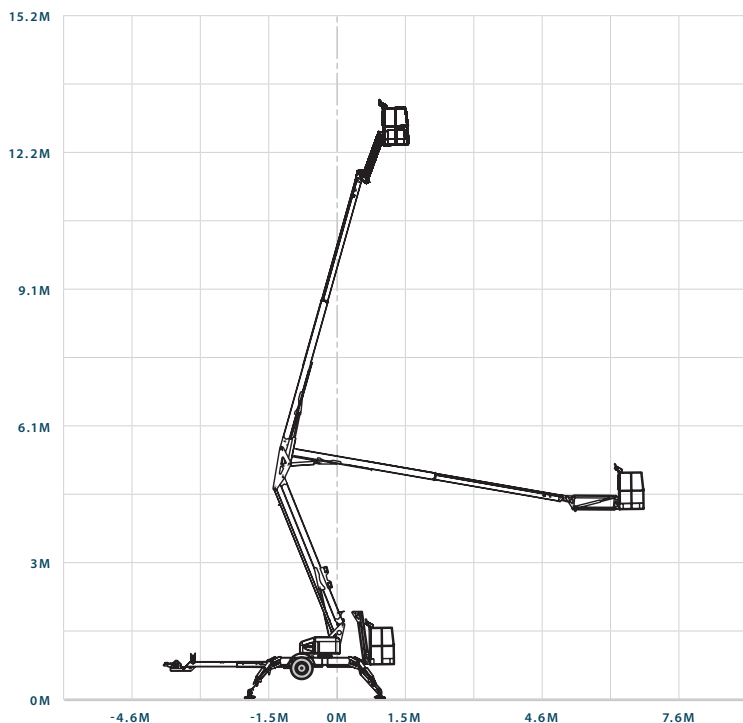

### SAFETY REQ.



### TRANSPORT REQ.




13 Metre Cherry Pickers

HTA13P

	HAULOTTE HTA16P
WORKING HEIGHT	15.70m
PLATFORM HEIGHT	13.70m
PLATFORM SIZE	1220 x 760mm
PLATFORM CAPACITY	227kg
WORKING OUTREACH	8.20m
ROTATION SLEW	700° (non-continuous)
OVERALL HEIGHT STOWED	1950mm
OVERALL WIDTH (OUTRIGGERS RETRACTED)	1660mm
OVERALL WIDTH (OUTRIGGERS EXTENDED)	3800mm
OVERALL LENGTH STOWED	5900mm
GROSS WEIGHT	1905kg
FUEL	Battery/Petrol



## HAULOTTE HTA16P

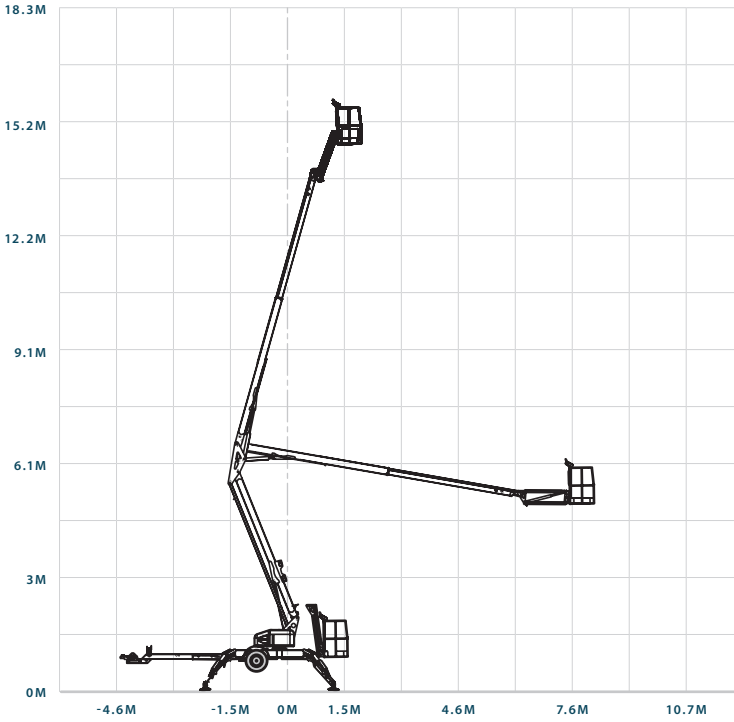

### SAFETY REQ.



### TRANSPORT REQ.



16 Metre Cherry Pickers

HTA16P


43

	NIFTY 170T
WORKING HEIGHT	17.10m
PLATFORM HEIGHT	15.10m
PLATFORM SIZE	1100 x 650mm
PLATFORM CAPACITY	200kg
WORKING OUTREACH	8700mm
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	2150mm
OVERALL WIDTH (OUTRIGGERS RETRACTED)	1650mm
OVERALL WIDTH (OUTRIGGERS EXTENDED)	4400mm
OVERALL LENGTH STOWED	6200mm
GROSS WEIGHT	1995kg
FUEL - BI-ENERGY	Battery/Petrol





## NIFTY 170T

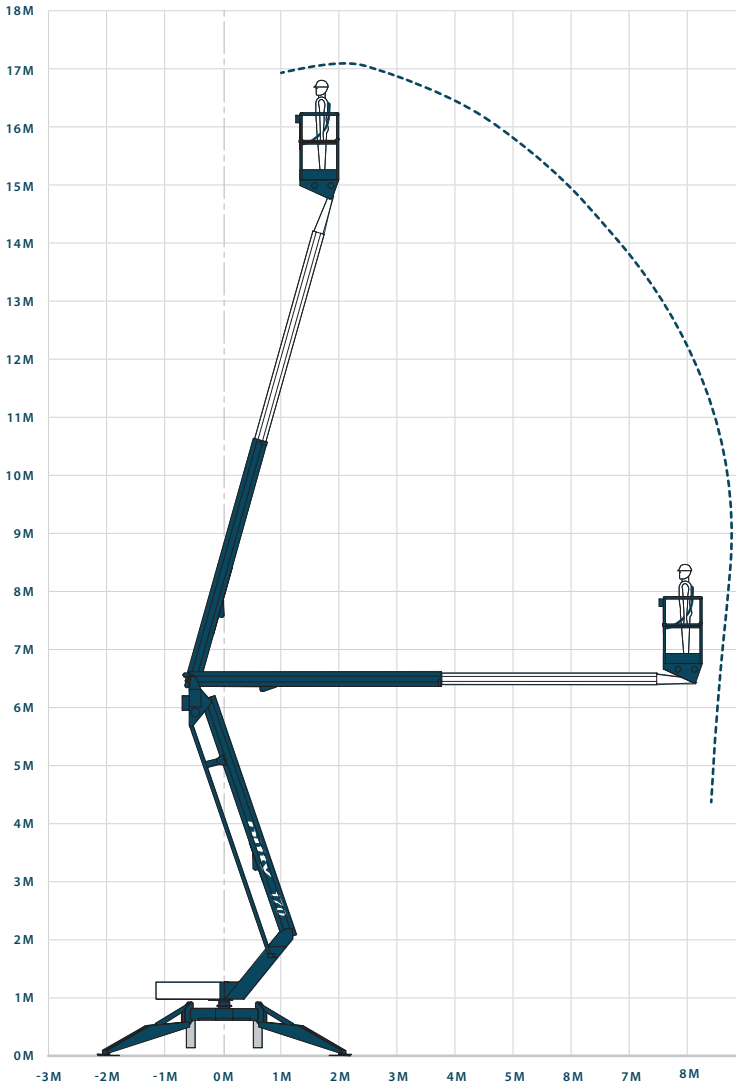

### SAFETY REQ.



### TRANSPORT REQ.



17 Metre Cherry Pickers

170T

45



# If you need the perfect all rounder...

The perfect all-rounder, Knucklebooms allow you to be mobile while reaching up and over objects. They have exceptional reach via a telescopic upper boom; while in-basket controls provide accuracy when positioning the working platform.

Electric Knucklebooms are great for indoor use or outside on level ground. Some machines have non-marking tyres which minimises the possibility of damage to indoor floor coverings, while bi-fuel (battery and diesel power options) provides minimal noise and no diesel fumes. 4WD Knucklebooms can only be used outdoors (unless suitable indoor ventilation). Their all-wheel drive capabilities make them ideal for accessing work sites over rough terrain.

Knucklebooms can be driven while the basket is elevated, making this machine perfect for jobs where progress requires repositioning of the work platform. Accessman will provide you with a free harness to wear while working in the basket of the knuckleboom as per national Health & Safety requirements.

Knucklebooms are available in 12-metre, 15-metre, 16-metre, 17-metre, 18-metre, 20 metre, 21 metre, 26 metre, 28-metre, 32-metre and 41-metre varieties. They can not be towed, so Accessman will deliver and pick-up your Knuckleboom to and from your job site.

*Machine availability and specifications do vary between regions.*

*Please contact your local branch for more information.*




Knucklebooms

	HAULOTTE HA12 CJ+
WORKING HEIGHT	11.70m
PLATFORM HEIGHT	9.70m
PLATFORM SIZE	1150 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	7.22m
ROTATION SLEW	355°
OVERALL HEIGHT STOWED	1990mm
OVERALL WIDTH	1200mm
OVERALL LENGTH	5640mm
GROSS WEIGHT	6970kg
FUEL	Battery

**NOTE:** HAS NON-MARKING TYRES



## HAULOTTE HA12 CJ+

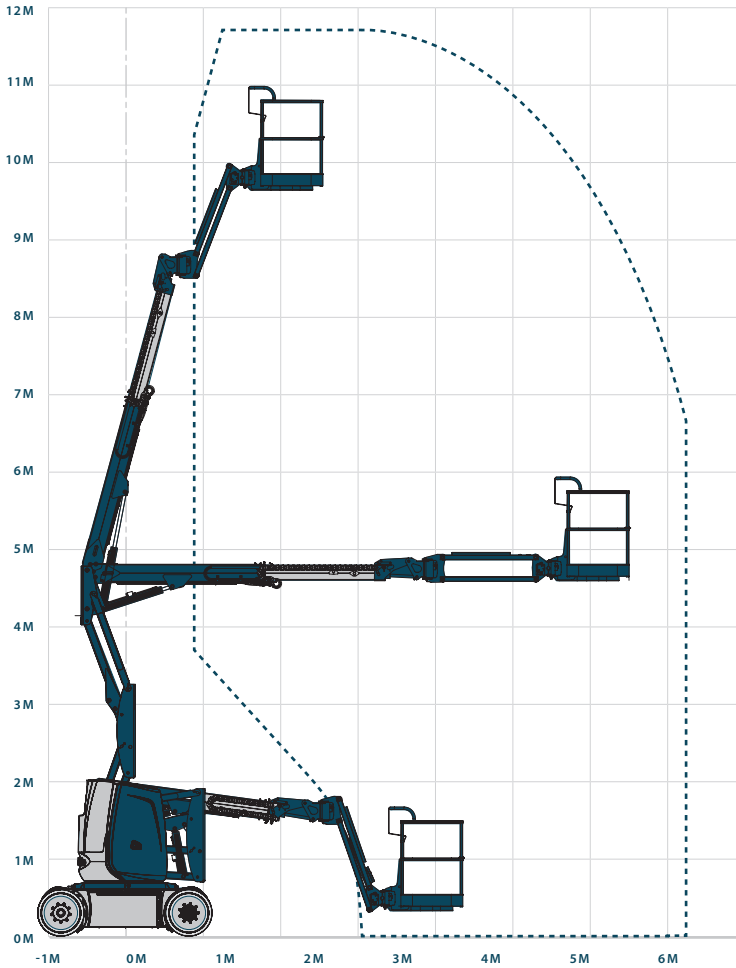

### SAFETY REQ.



### TRANSPORT REQ.



12 Metre Electric Knucklebooms

HA12 CJ+

# 12 Metre Bi-Energy Knucklebooms

HR12  
HR12 4WD

50

	NIFTY HR12	NIFTY HR12 4WD
WORKING HEIGHT	12.20m	12.20m
PLATFORM HEIGHT	10.20m	10.20m
PLATFORM SIZE	1100 x 650mm	1100 x 650mm
PLATFORM CAPACITY	200kg	200kg
PLATFORM ROTATOR	NA	NA
HORIZONTAL OUTREACH	6100mm	6100mm
ROTATION SLEW	360°	360°
OVERALL HEIGHT STOWED	1900mm	1950mm
OVERALL WIDTH	1500mm	1600mm
OVERALL LENGTH STOWED	4100mm	4100mm
GROSS WEIGHT	3035kg	3470kg / 3330kg
FUEL - BI-ENERGY	Battery/Diesel	Battery/Diesel


**NOTE:** HAS NON-MARKING TYRE OPTION



NIFTY HR12 / HR12 4WD



## NIFTY HR12

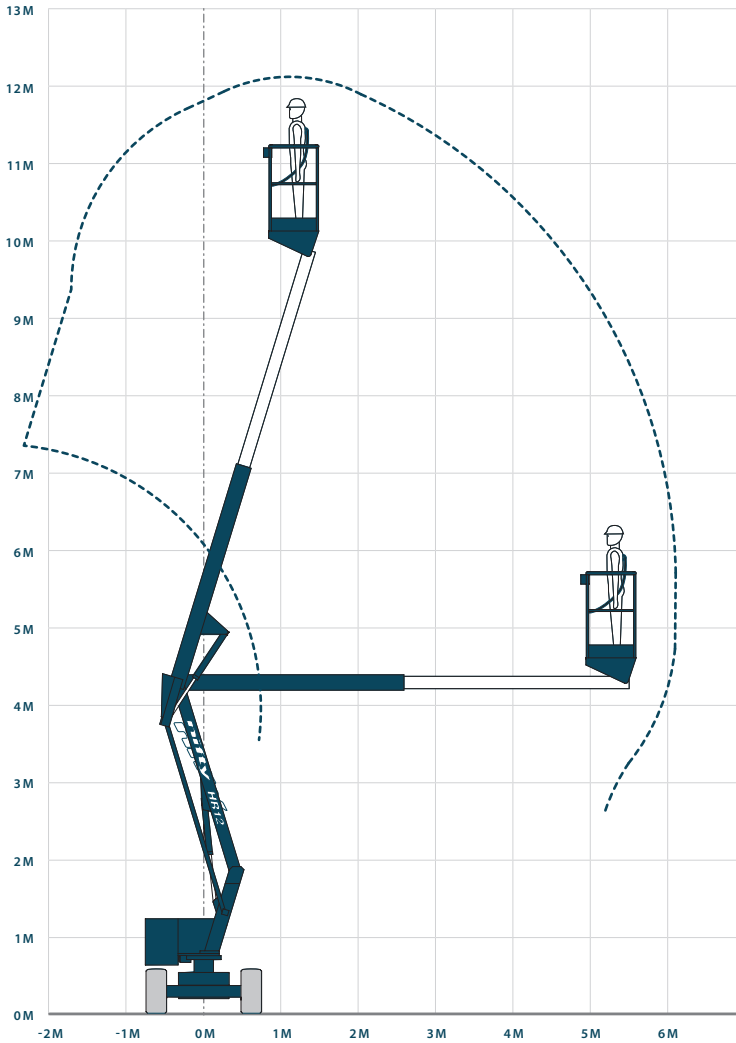

SAFETY REQ.



TRANSPORT REQ.




12 Metre Bi-Energy Knucklebooms

HR12  
HR12 4WD

	HAULOTTE HA120PX
WORKING HEIGHT	12.40m
PLATFORM HEIGHT	10.40m
PLATFORM SIZE	1500 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	6600mm
OVERALL HEIGHT STOWED	2200mm
OVERALL WIDTH	1900mm
OVERALL LENGTH STOWED	5500mm
GROSS WEIGHT	5620kg
FUEL	Diesel



## HAULOTTE HA120PX

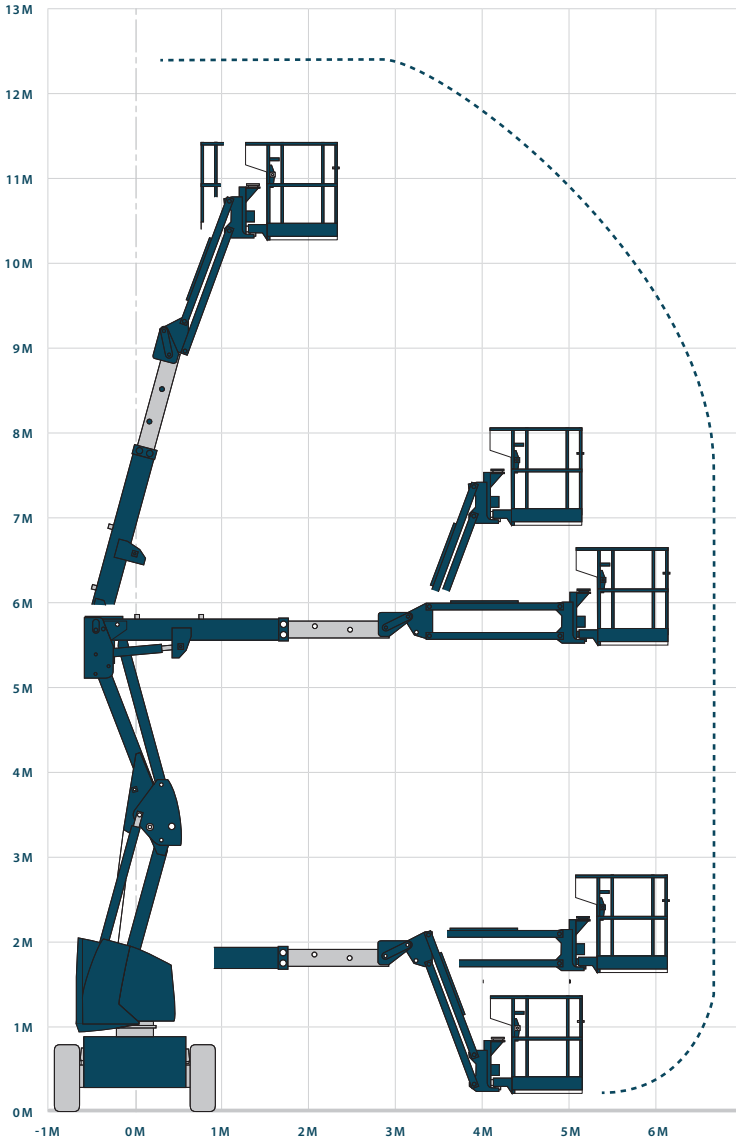

SAFETY REQ.

TRANSPORT REQ.



12 Metre Diesel Knucklebooms

HA120PX


53

	HAULOTTE HA15IP
WORKING HEIGHT	15.0m
PLATFORM HEIGHT	13.0m
PLATFORM SIZE	1200 x 800mm
PLATFORM CAPACITY	230kgs
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	8450mm
OVERALL HEIGHT STOWED	2000mm
OVERALL WIDTH	1500mm
OVERALL LENGTH	6600mm
GROSS WEIGHT	7300kg
FUEL	Battery

**NOTE:** HAS A NON-MARKING TYRE OPTION



## HAULOTTE HA15IP

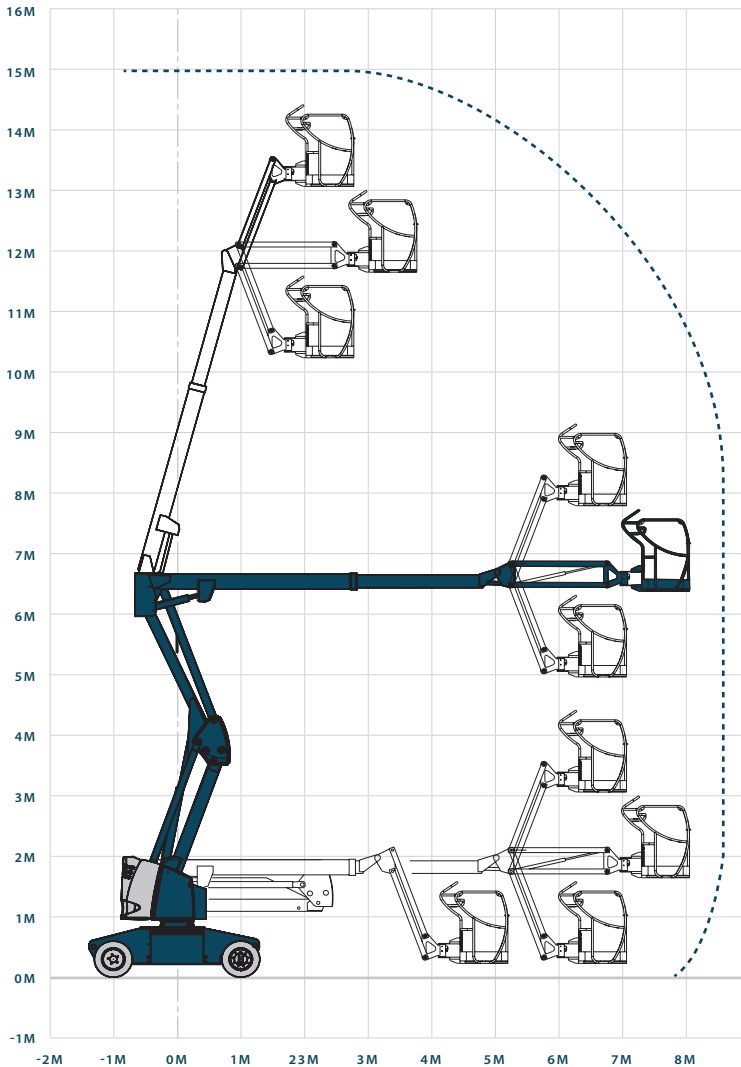

SAFETY REQ.



TRANSPORT REQ.



15 Metre Electric Knucklebooms

HA15IP


55

	NIFTY HR15
WORKING HEIGHT	15.40m
PLATFORM HEIGHT	13.40m
PLATFORM SIZE	1500 x 700mm
PLATFORM CAPACITY	225kg
HORIZONTAL OUTREACH	9600mm
OVERALL HEIGHT STOWED	2100mm
OVERALL WIDTH	1500mm
OVERALL LENGTH	6300mm
GROSS WEIGHT	6623kg
FUEL	Battery





## NIFTY HR15

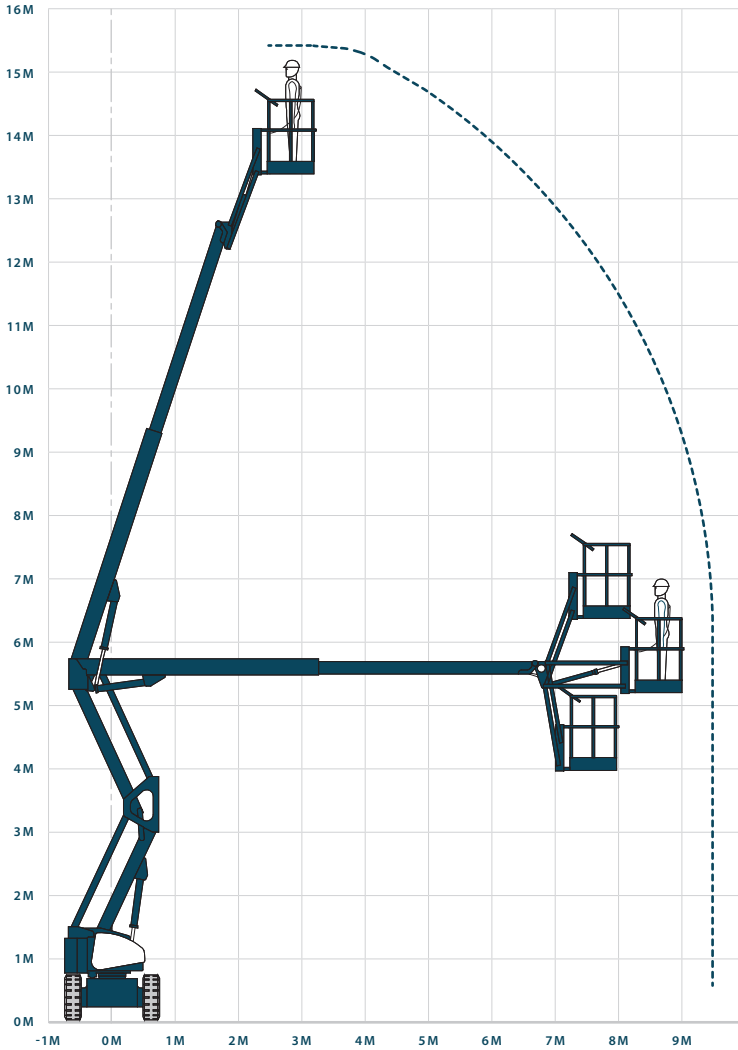

SAFETY REQ.



TRANSPORT REQ.



15 Metre Electric Knucklebooms

HR15

57

# 15 Metre Bi-Energy Knucklebooms

GENIE  
Z45/25J


58

	GENIE Z-45/25J
WORKING HEIGHT	15.94m
PLATFORM HEIGHT	13.94m
PLATFORM SIZE	1830 x 760mm
PLATFORM CAPACITY	227kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	7650mm
ROTATION SLEW	355° <i>(non continuous)</i>
OVERALL HEIGHT STOWED	2000mm
OVERALL WIDTH	1790mm
OVERALL LENGTH	6830mm
GROSS WEIGHT	7620kg
TAIL SWING	Zero
FUEL	Diesel/Battery



GENIE Z45/25J

## GENIE Z-45/25J

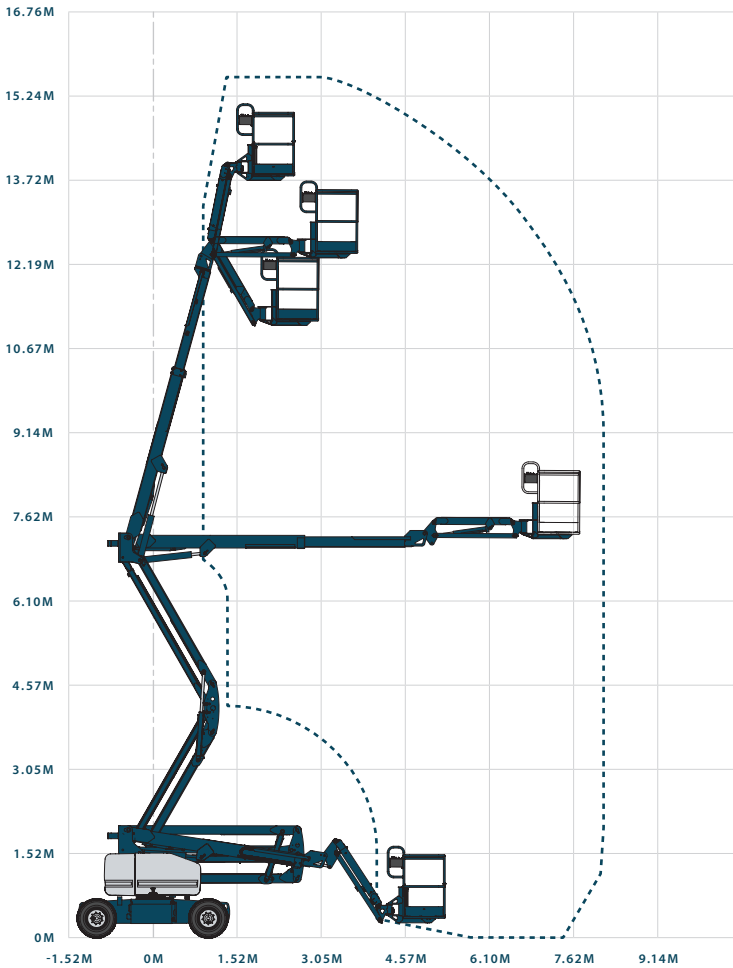

SAFETY REQ.



TRANSPORT REQ.



15 Metre Bi-Energy Knucklebooms

GENIE  
Z45/25J


59

	HAULOTTE HA16PX
WORKING HEIGHT	16.00m
PLATFORM HEIGHT	14.00m
PLATFORM SIZE	1800 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	9150mm
ROTATION SLEW	360° <i>(non continuous)</i>
OVERALL HEIGHT STOWED	2300mm
OVERALL WIDTH	2300mm
OVERALL LENGTH	6950mm
GROSS WEIGHT	6950kg
TAIL SWING	Zero
FUEL	Diesel



HAULOTTE HA16PX

## HAULOTTE HA16PX

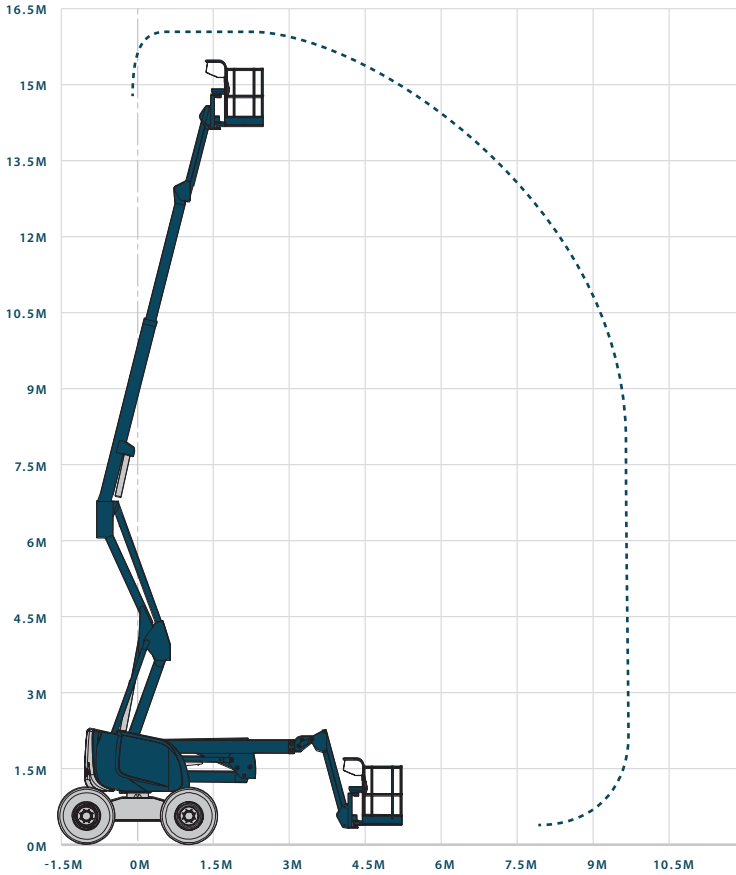

### SAFETY REQ.



### TRANSPORT REQ.



16 Metre Diesel Knucklebooms

HA16PX


61

	HAULOTTE HA16RTJ PRO
WORKING HEIGHT	16.00m
PLATFORM HEIGHT	14.00m
PLATFORM SIZE	1830 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	8300mm
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	2300mm
OVERALL WIDTH	2300mm
OVERALL LENGTH	6750mm
GROSS WEIGHT	6650kg
TAIL SWING	Zero
FUEL	Diesel





## HAULOTTE HA16RTJ PRO

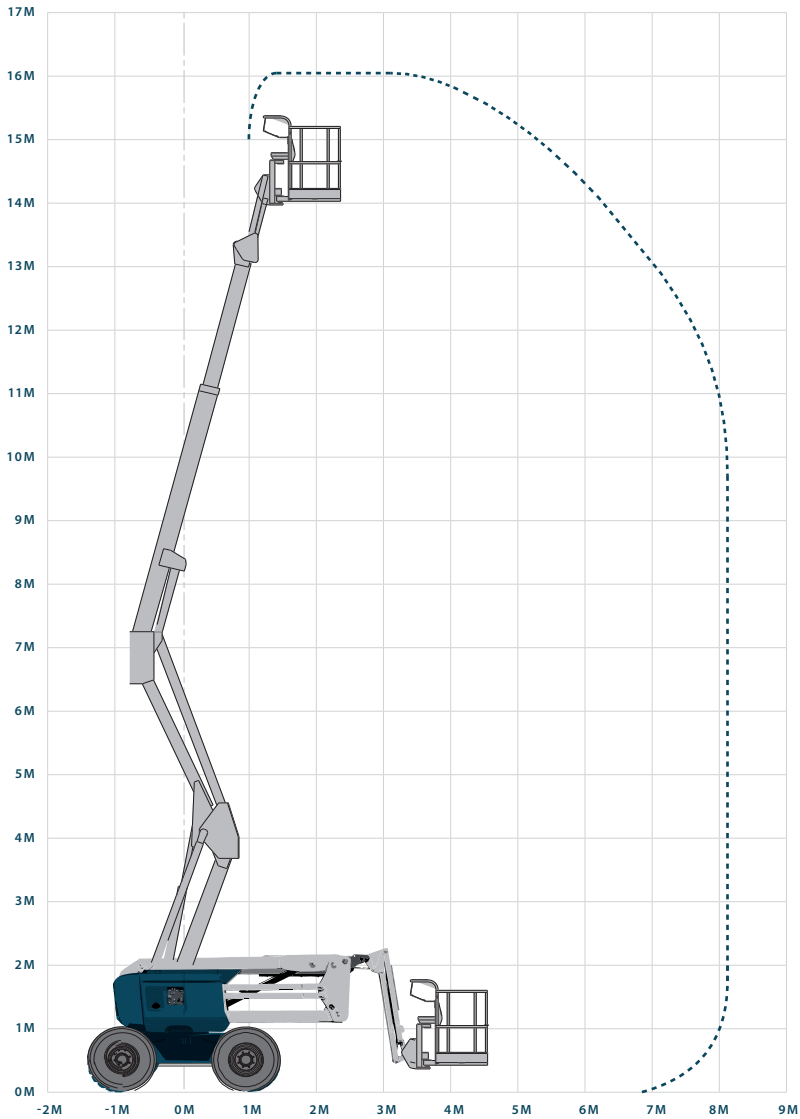

SAFETY REQ.



TRANSPORT REQ.



16 Metre Diesel Knucklebooms


HA16RTJ PRO

	NIFTY HR17 HYBRID	NIFTY HR17 HYBRID (NEW)
WORKING HEIGHT	17.00m	17.20m
PLATFORM HEIGHT	15.00m	15.20m
PLATFORM SIZE	1800 x 850mm	1800 x 850mm
PLATFORM CAPACITY	225kg	225kg
PLATFORM ROTATOR	Yes	Yes
HORIZONTAL OUTREACH	9100mm	9400mm
ROTATION SLEW	360° (non continuous)	360° (non continuous)
OVERALL HEIGHT STOWED	2510mm	2100mm
OVERALL WIDTH	2000mm	2000mm
OVERALL LENGTH	6300mm	6350mm
GROSS WEIGHT	4850kg	5000kg
TAIL SWING	Zero	Zero
FUEL - BI-ENERGY	Battery/Diesel	Battery/Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION  
MACHINES VARY BETWEEN BRANCHES



## NIFTY HR17 HYBRID

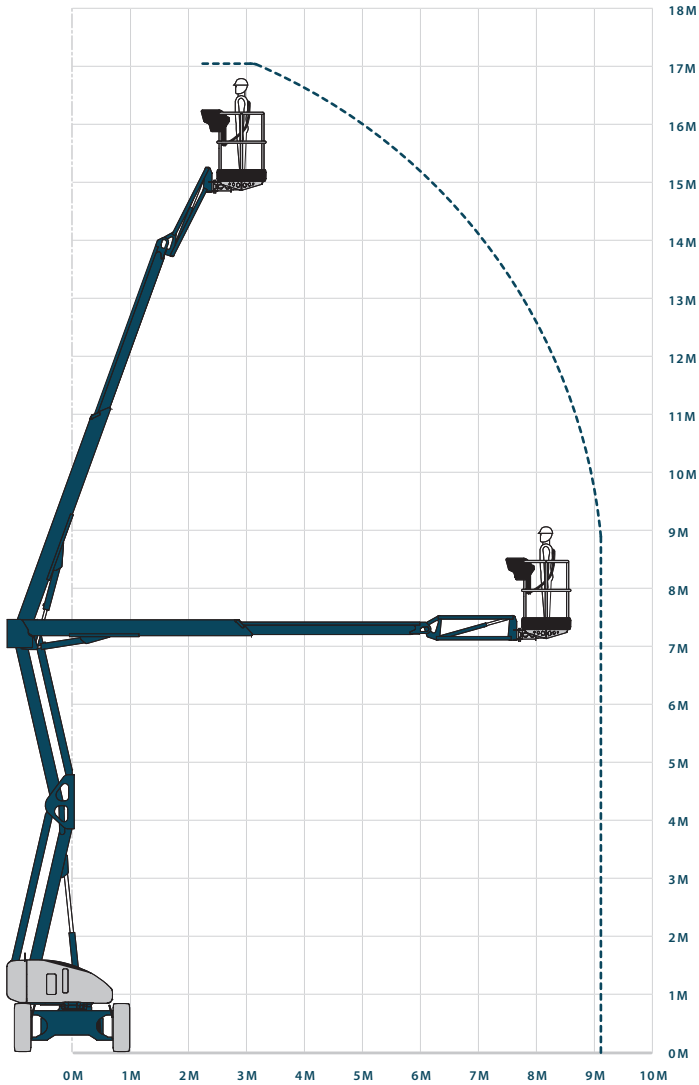

SAFETY REQ.



TRANSPORT REQ.



17 Metre Bi-Energy Knucklebooms


HR17 HYBRID

	HAULOTTE HA18PX
WORKING HEIGHT	17.30m
PLATFORM HEIGHT	15.30m
PLATFORM SIZE	1800 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	10.60m
ROTATION SLEW	360° <i>(non continuous)</i>
OVERALL HEIGHT STOWED	2300mm
OVERALL WIDTH	2300mm
OVERALL LENGTH	7600mm
GROSS WEIGHT	8050kg
TAIL SWING	Zero
FUEL	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION



HAULOTTE HA18PX

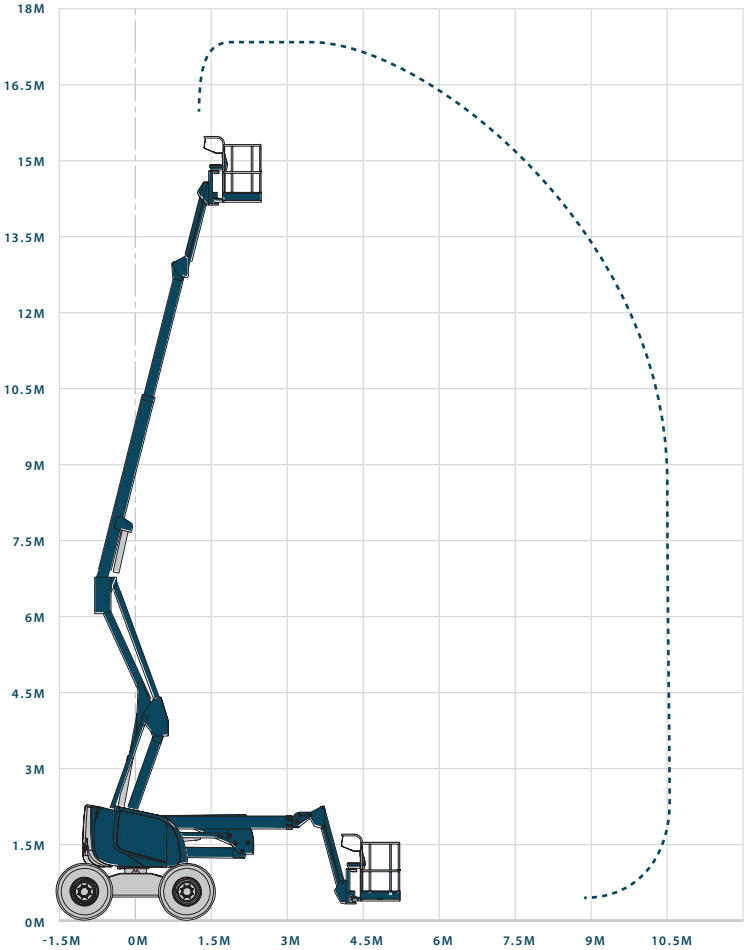

SAFETY REQ.



TRANSPORT REQ.



18 Metre Diesel Knucklebooms

HA18PX

	DINGLI BA16J-AWD
WORKING HEIGHT	18.00m
PLATFORM HEIGHT	16.00m
PLATFORM SIZE	1800 x 760mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	8850mm
ROTATION SLEW	360° (continuous)
OVERALL HEIGHT STOWED	2330mm
OVERALL WIDTH	2300mm
OVERALL LENGTH	7590mm
GROSS WEIGHT	7835kg
TAIL SWING	Zero
FUEL	Diesel


**NOTE:** HAS A NON-MARKING TYRE OPTION



DINGLI BA16J-AWD



DINGLI BA16J-AWD

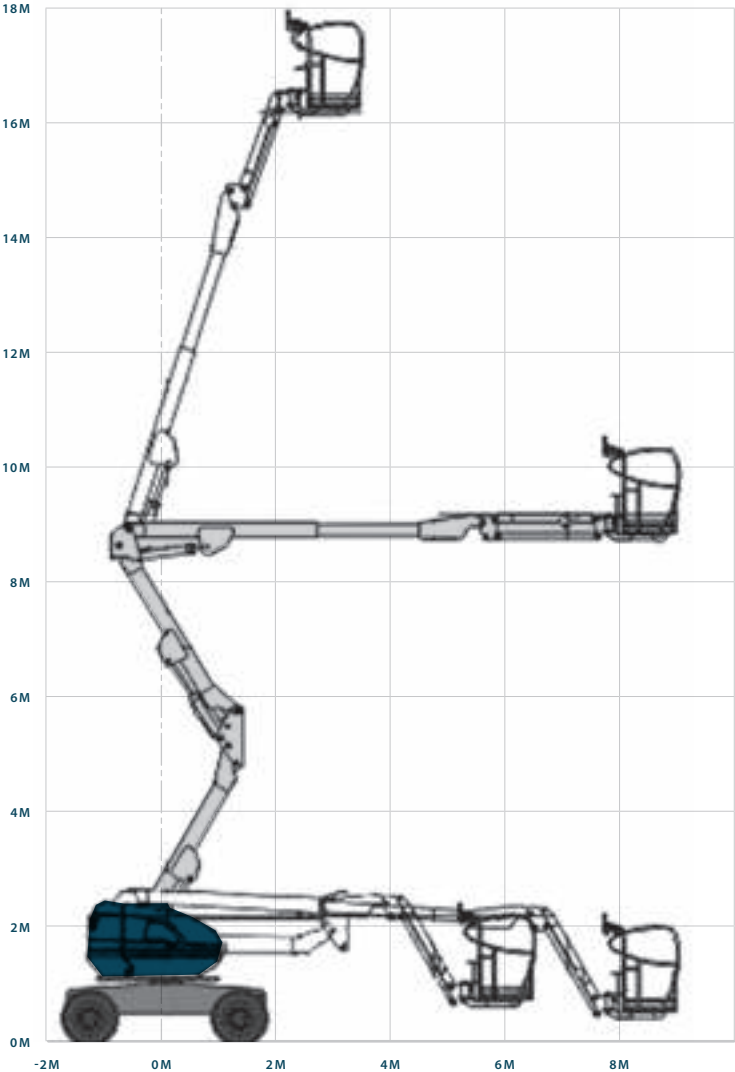

SAFETY REQ.



TRANSPORT REQ.



18 Metre Diesel Knucklebooms

BA16J-AWD


	MEC60JE	MEC60JD
WORKING HEIGHT	20.10m	20.10m
PLATFORM HEIGHT	18.30m	18.30m
PLATFORM SIZE	2400 x 1000mm	2400 x 1000mm
PLATFORM CAPACITY	227kg	227kg
PLATFORM ROTATOR	Yes	Yes
MAXIMUM OUTREACH	13m	13m
OVERALL HEIGHT STOWED	2480mm	2500mm
OVERALL WIDTH	2450mm	2400mm
OVERALL LENGTH STOWED	9300mm	9300mm
GROSS WEIGHT	8390kg	8119kg
FUEL	Battery	Diesel

**NOTE:** MEC60JE HAS A NON-MARKING TYRE OPTION



MEC60JE / MEC60JD

## MEC60J

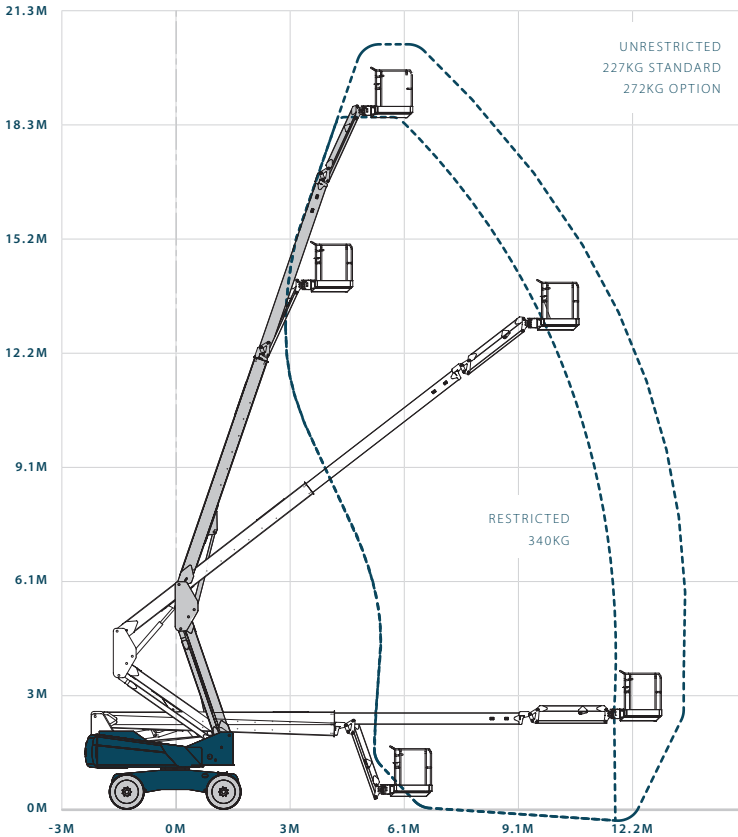

SAFETY REQ.



TRANSPORT REQ.



20-21 Metre Electric & Diesel Knucklebooms


MEC60JE  
MEC60JD

	HAULOTTE HA20RTJ PRO
WORKING HEIGHT	20.60m
PLATFORM HEIGHT	18.60m
PLATFORM SIZE	1800 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	12.20m
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	2510mm
OVERALL WIDTH	2420mm
OVERALL LENGTH	8800mm
GROSS WEIGHT	9600kg
FUEL	Diesel

**NOTE:** HAS A NON-MARKING TYRE OPTION



## HAULOTTE HA20RTJ PRO

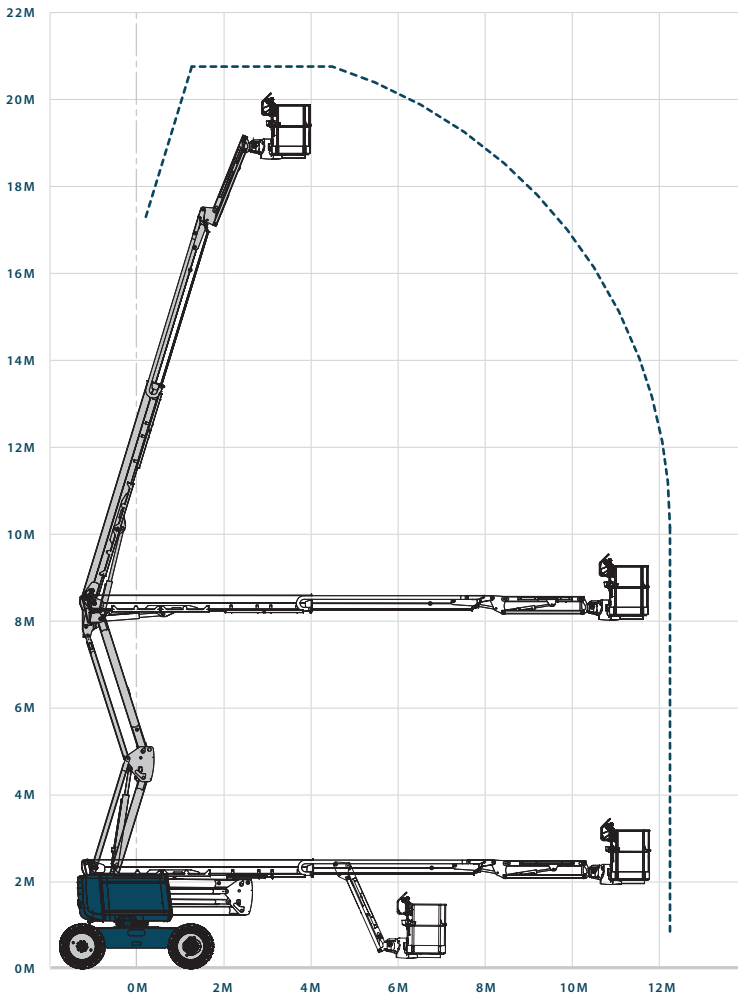

SAFETY REQ.



TRANSPORT REQ.



20-21 Metre Diesel Knuckleboom

HA20RTJ PRO


	HAULOTTE HA20 LE PRO
WORKING HEIGHT	20.76m
PLATFORM HEIGHT	18.76m
PLATFORM SIZE	1830 x 800mm
PLATFORM CAPACITY	250kg/350kg
PLATFORM ROTATOR	180°
HORIZONTAL OUTREACH	11.91m
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	2500mm
OVERALL WIDTH	2410mm
OVERALL LENGTH	8540mm
GROSS WEIGHT	9785kg
FUEL	Battery

**NOTE:** HAS A NON-MARKING TYRE OPTION





## HAULOTTE HA20 LE PRO

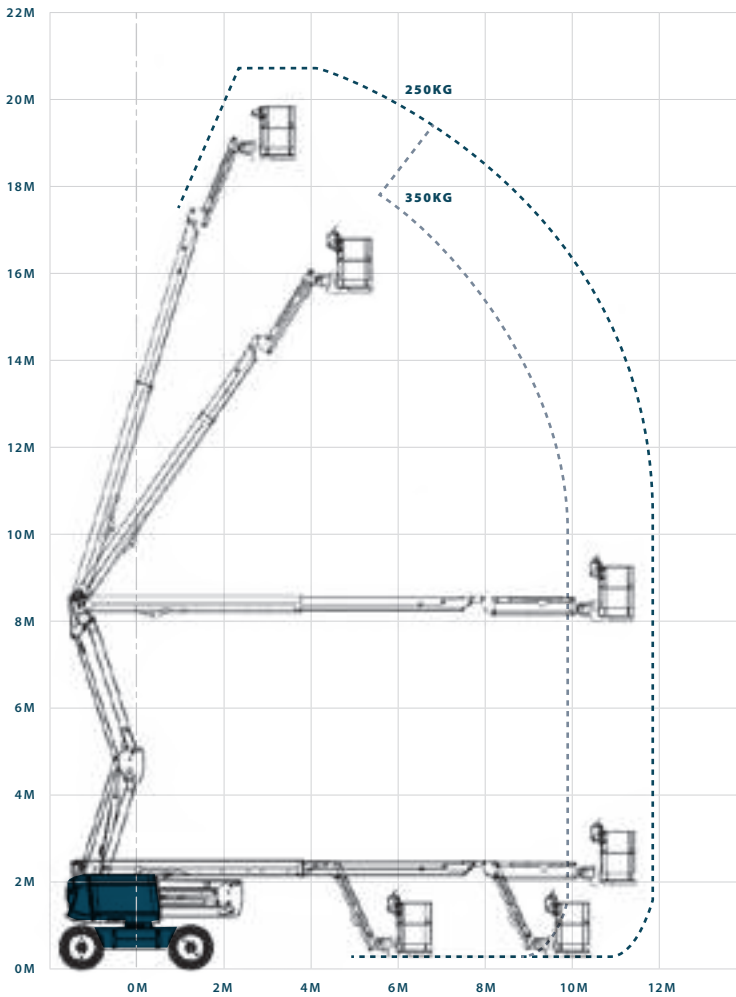

SAFETY REQ.



TRANSPORT REQ.



20-21 Metre Electric Knuckleboom

HA20LE PRO


75

	NIFTY HR21	NIFTY HR21 (HYBRID)
WORKING HEIGHT	20.70m	20.80m
PLATFORM HEIGHT	18.70m	18.80m
PLATFORM SIZE	1800 x 700mm	1800 x 800mm
PLATFORM CAPACITY	225kg	250kg
HORIZONTAL OUTREACH	12.60m	13.00m
PLATFORM ROTATOR	Yes	Yes
ROTATION SLEW	360°	360°
OVERALL HEIGHT STOWED	2150mm	2180mm
OVERALL WIDTH	2250mm	2270mm
OVERALL LENGTH	6250mm	6620mm
GROSS WEIGHT	6350kg	6640kg
FUEL - BI-ENERGY (OPTION)	Diesel	Diesel/Battery

**NOTE:** HAS A NON-MARKING TYRE OPTION  
MACHINES MAY VARY BETWEEN BRANCHES



## NIFTY HR21

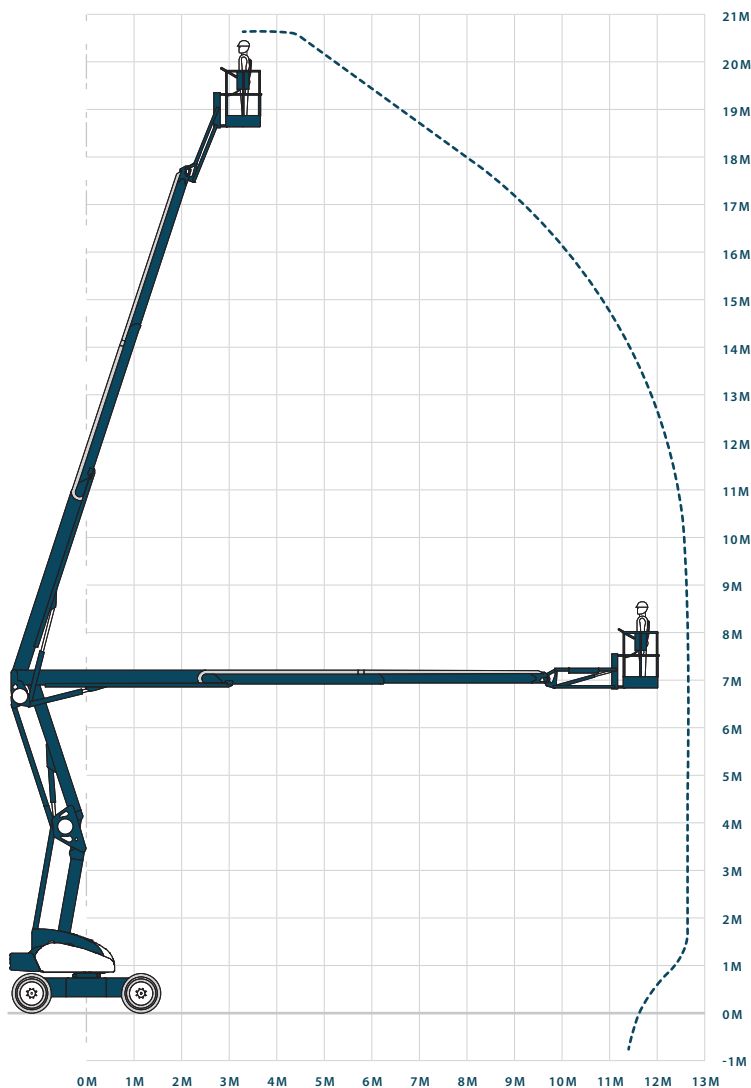

SAFETY REQ.



TRANSPORT REQ.



20-21 Metre Bi-Energy Knucklebooms


HR21

77

	NIFTY 21SD
WORKING HEIGHT	21.30m
PLATFORM HEIGHT	19.30m
PLATFORM SIZE	1500 x 700mm
PLATFORM CAPACITY	225kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	12.60m
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	2.25m
OVERALL WIDTH STOWED	2.05m
WIDTH (LEGS EXTENDED)	4.20m
OVERALL LENGTH	6.15m
GROSS WEIGHT	3950kg
FUEL	Diesel



## NIFTY 21SD

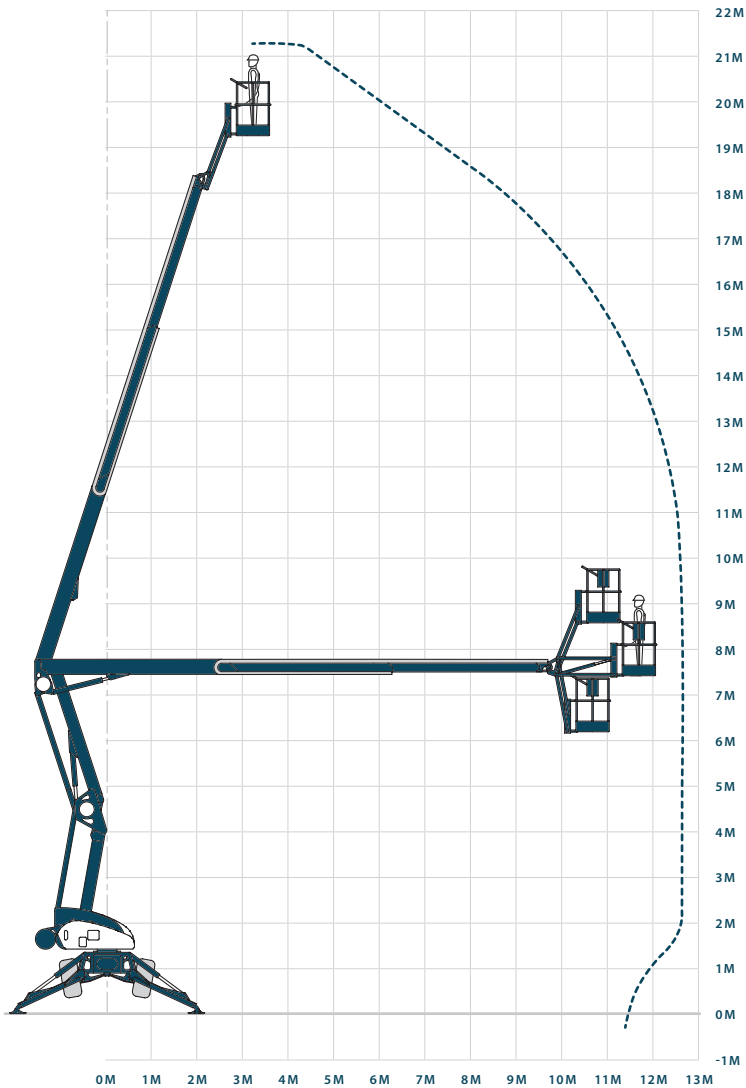

SAFETY REQ.



TRANSPORT REQ.



21 Metre Diesel Knuckleboom

21SD

79

	HAULOTTE HA260PX
WORKING HEIGHT	25.60m
PLATFORM HEIGHT	23.60m
PLATFORM SIZE	1800 x 800mm or 2440 x 800mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	16.20m
ROTATION SLEW	360°
OVERALL HEIGHT STOWED	2670mm
OVERALL WIDTH	2380mm
OVERALL LENGTH	12.00m
GROSS WEIGHT	15950kg
FUEL	Diesel


**NOTE:** THE HA260PX COMES IN 2 PLATFORM SIZES (AS ABOVE)  
HAS A NON-MARKING TYRE OPTION

HAULOTTE HA260PX





## HAULOTTE HA260PX

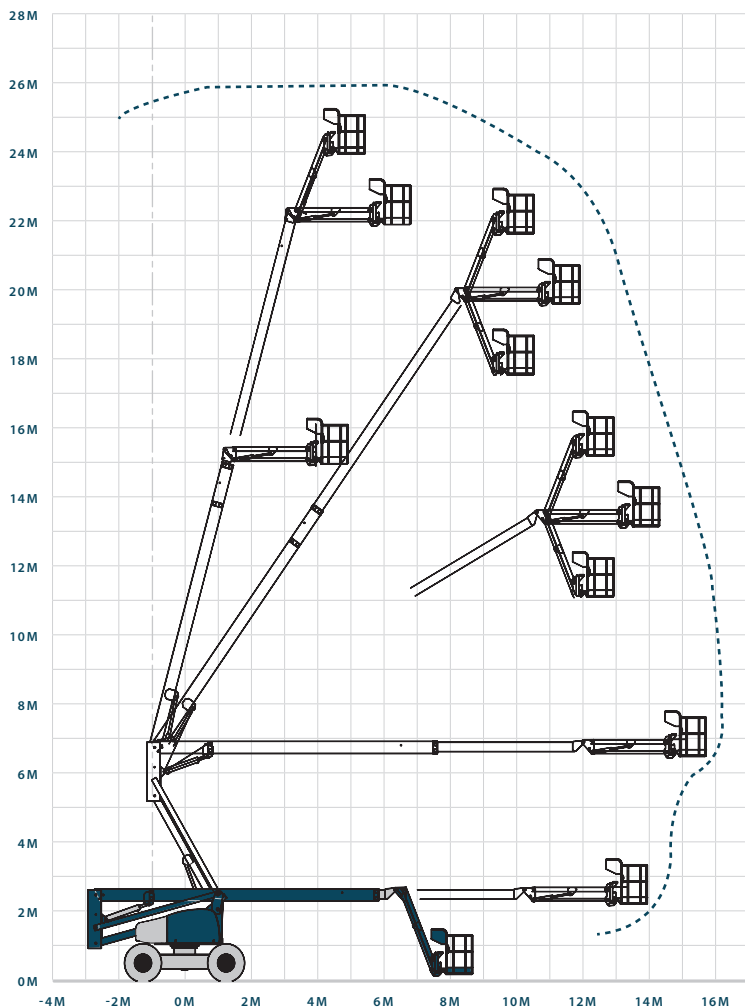

SAFETY REQ.



TRANSPORT REQ.



26 Metre Diesel Knuckleboom

HA260PX


81

	NIFTY HR28
WORKING HEIGHT	28.00m
PLATFORM HEIGHT	26.00m
PLATFORM SIZE	2400 x 900mm
PLATFORM CAPACITY	280kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	19.00m
ROTATION SLEW	180°
OVERALL HEIGHT STOWED	2700mm
OVERALL WIDTH	2490mm
OVERALL LENGTH	9280mm
GROSS WEIGHT	14650kg
FUEL - BI-ENERGY	Diesel/Battery

**NOTE:** HAS A NON-MARKING TYRE OPTION



## NIFTY HR28

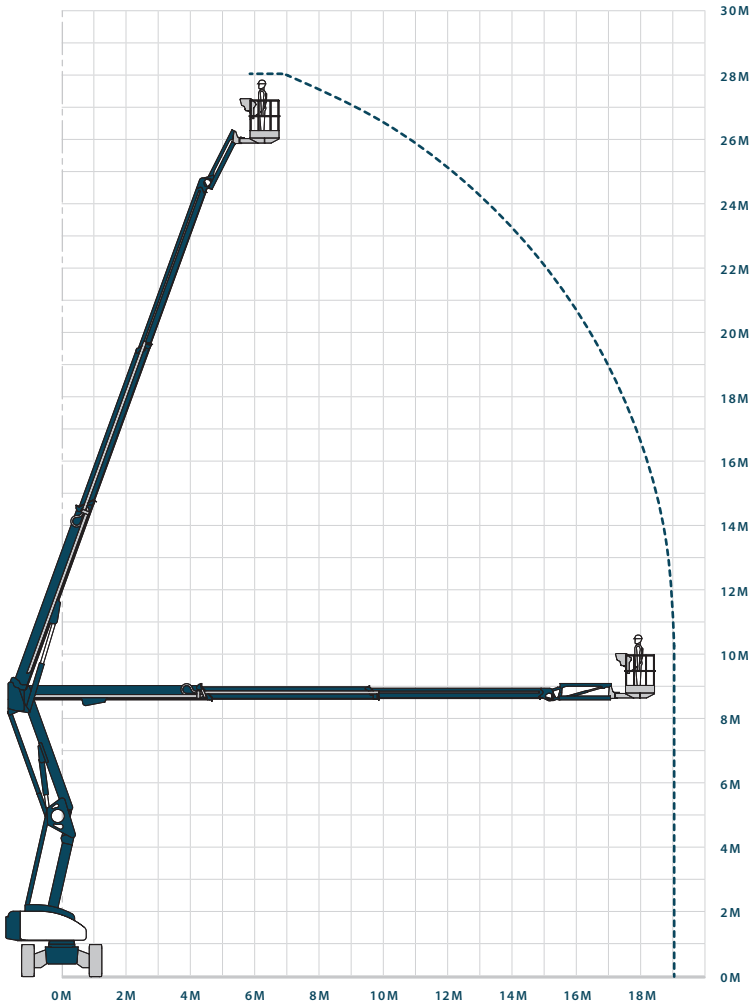

### SAFETY REQ.



### TRANSPORT REQ.



28 Metre Bi-Energy Knuckleboom


HR28

83

	HAULOTTE HA32PX
WORKING HEIGHT	31.80m
PLATFORM HEIGHT	29.80m
PLATFORM SIZE	2440 x 800mm
PLATFORM CAPACITY	250kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	21.30m
ROTATION SLEW	360° ( <i>non continuous</i> )
OVERALL HEIGHT STOWED	2700mm
OVERALL WIDTH	2500mm
WIDTH WITH EXTENDED AXLES	3330mm
OVERALL LENGTH	11.16m
GROSS WEIGHT	21100kg
FUEL	Diesel



## HAULOTTE HA32PX

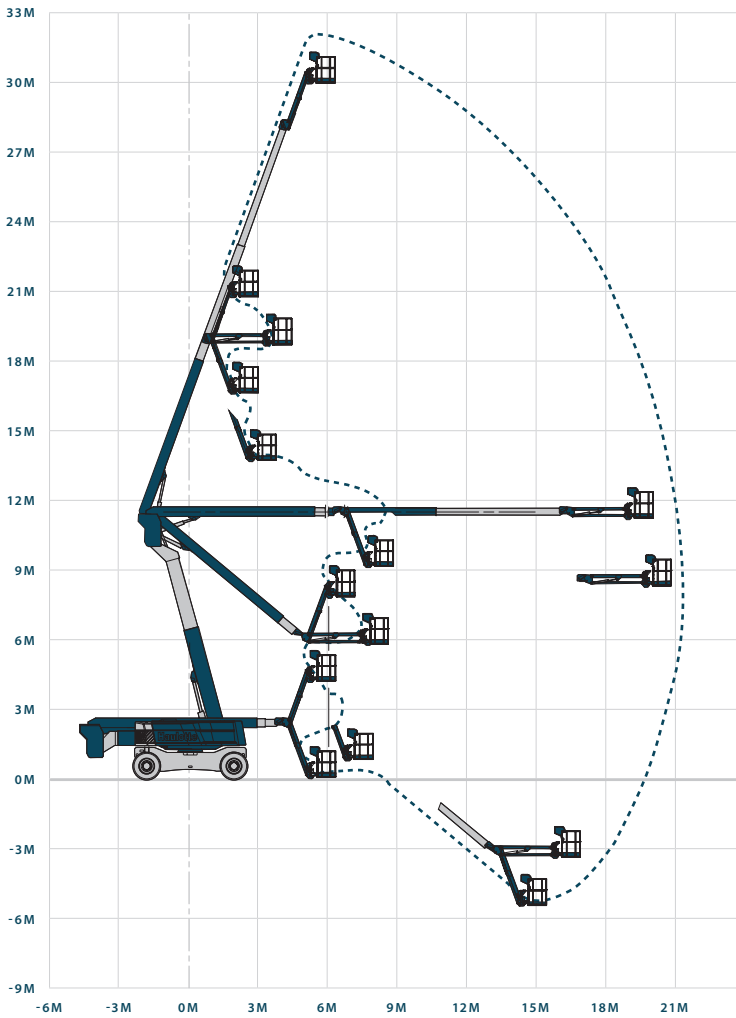

SAFETY REQ.



TRANSPORT REQ.



32 Metre Diesel Knuckleboom

HA32PX


85

	HAULOTTE HA41RTJ PRO
WORKING HEIGHT	41.50m
PLATFORM HEIGHT	39.50m
PLATFORM SIZE	2440 x 910mm
PLATFORM CAPACITY	230kg
PLATFORM ROTATOR	Yes
HORIZONTAL OUTREACH	20.10m
ROTATION SLEW	360° ( <i>continuous</i> )
OVERALL HEIGHT STOWED	2990mm
OVERALL WIDTH	2500mm
WIDTH WITH EXTENDED AXLES	3300mm
OVERALL LENGTH	13.10m
GROSS WEIGHT	23900kg
FUEL	Diesel





## HAULOTTE HA41RTJ PRO

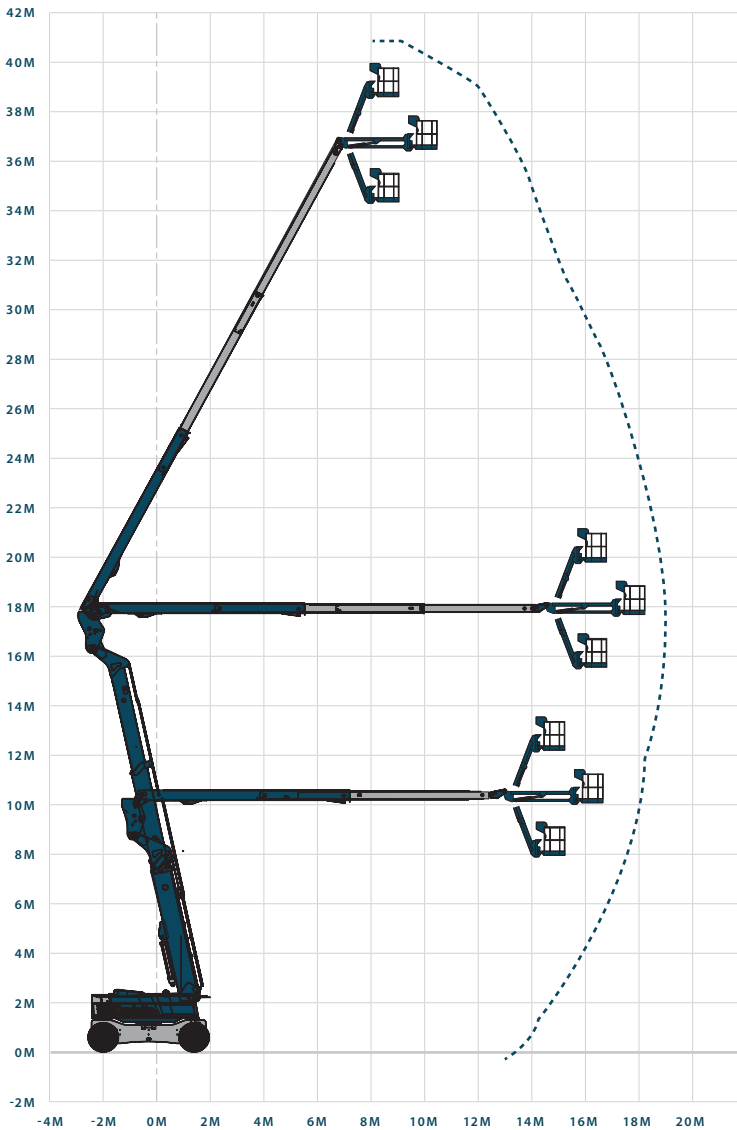

SAFETY REQ.



TRANSPORT REQ.



41 Metre Diesel Knuckleboom

HA41RTJ PRO



# If you need to work in a tight space...

Do you need to work in a tight space where tail swing from a machine would be detrimental? Telescopic Booms have zero tail swing making them perfect for working in restrictive areas. These machines have excellent reach and are well suited to outdoor jobs on level ground.

Operators are given complete control from the basket; making precision manoeuvres easy. Accessman will provide you with a free harness to wear while working in the basket of the Telescopic Booms as national health and safety laws require this.

Telescopic Booms are available in 23-metre varieties.

4WD

Telescopic

Booms cannot

be towed so

Accessman will happily deliver

and pick-up your machine, to and from  
your job site.

*Machine availability and specifications do  
vary between regions. Please contact your  
local branch for more information.*



Telescopic Booms


	HAULOTTE H23TPX	HAULOTTE HT23RTJ PRO
WORKING HEIGHT	22.60m	22.50m
PLATFORM HEIGHT	20.60m	20.50m
PLATFORM SIZE	2440 x 910mm	2440 x 910mm
PLATFORM CAPACITY	230kg	230kg
PLATFORM ROTATOR	Yes	Yes
HORIZONTAL OUTREACH	19.50m	18.30m
ROTATION SLEW	360° (continuous)	360° (continuous)
OVERALL HEIGHT STOWED	3.00m	2.70m
OVERALL WIDTH	2470mm	2470mm
OVERALL LENGTH	10.60m	10.40m
GROSS WEIGHT	13110kg	13400kg
FUEL	Diesel	Diesel

**NOTE:** HT23RTJ PRO HAS 4 WHEEL STEER CAPABILITY

H23TPX HAS REAR WHEEL STEER



## HAULOTTE HT23

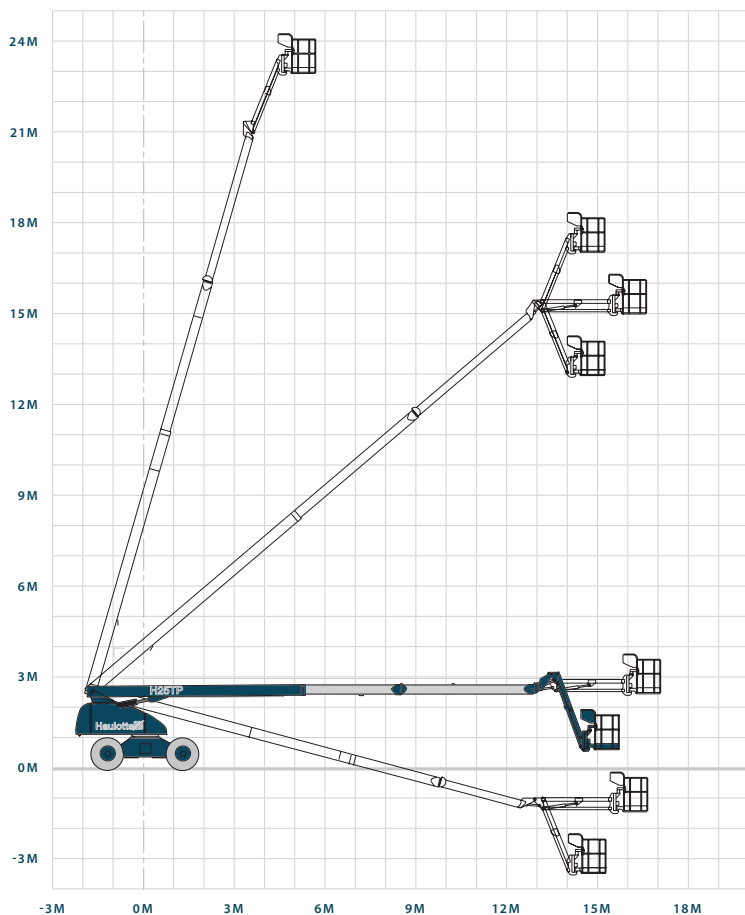

### SAFETY REQ.



### TRANSPORT REQ.



23 Metre Telescopic Booms

H23TPX  
HT23RTJ PRO



# Transport Truck

A renovated International with a Chieftain trailer imported from Ireland. The addition of the International to our fleet means that we will not only be able to do our own deliveries of our bigger machines in and around town, but we will also be able to move these larger machines around our smaller branches and franchises with a lot more ease.





## Tracess 170 Spider

Nick named the Spider - This tracked cherry picker has a bi-fuel engine, where it can run on 110V electricity or Petrol engine. This means it is ideal for using to access high level internals for example atrium cleaning, factory cleans, factory maintenance, high level painting and other high level internal building maintenance.

The tracked access platform is a unit with a very small base but a platform with a large cage and excellent working envelope. The cage can be readily removed to allow the unit to pass through a single standard doorway.


Offering 17m of working height and 7.5m of working outreach, 90 degree each way cage rotation, a light transit weight, and small footprint but at the same time a 200 kg payload throughout the whole working envelope.

## MC285 Mini Crawler Crane

The MC285 boxes way above its weight with a massive 2.82 ton lifting capacity while measuring just 750mm wide when stowed. It's slim body is able to fit through most doorways, allowing access to areas previously inaccessible to standard cranes.

The MC285 has proven to be one of the most popular models of mini crane and is used in many varied applications. The latest version of the MC285 model features improved safety features, a 4/2 fall hook block as standard and is faster and easier to operate than ever before.


*Machine availability and specifications do vary between regions. Please contact your local branch for more information.*



	TRACESS170 - SPIDER
WORKING HEIGHT	17.00m
PLATFORM SIZE	1300 x 700mm
PLATFORM HEIGHT	15.00m
PLATFORM CAPACITY	200kg
WORKING OUTREACH	7.50m
SLEW ROTATION	330° <i>(non continuous)</i>
OVERALL HEIGHT STOWED	2.00m
OVERALL WIDTH STOWED (OUTRIGGERS RETRACTED)	810mm
OVERALL WIDTH STOWED (OUTRIGGERS EXTENDED)	3160mm
OVERALL LENGTH STOWED	4550mm
GROSS WEIGHT	2000kg
FUEL	Electric/Petrol



## TRACESS170 - SPIDER

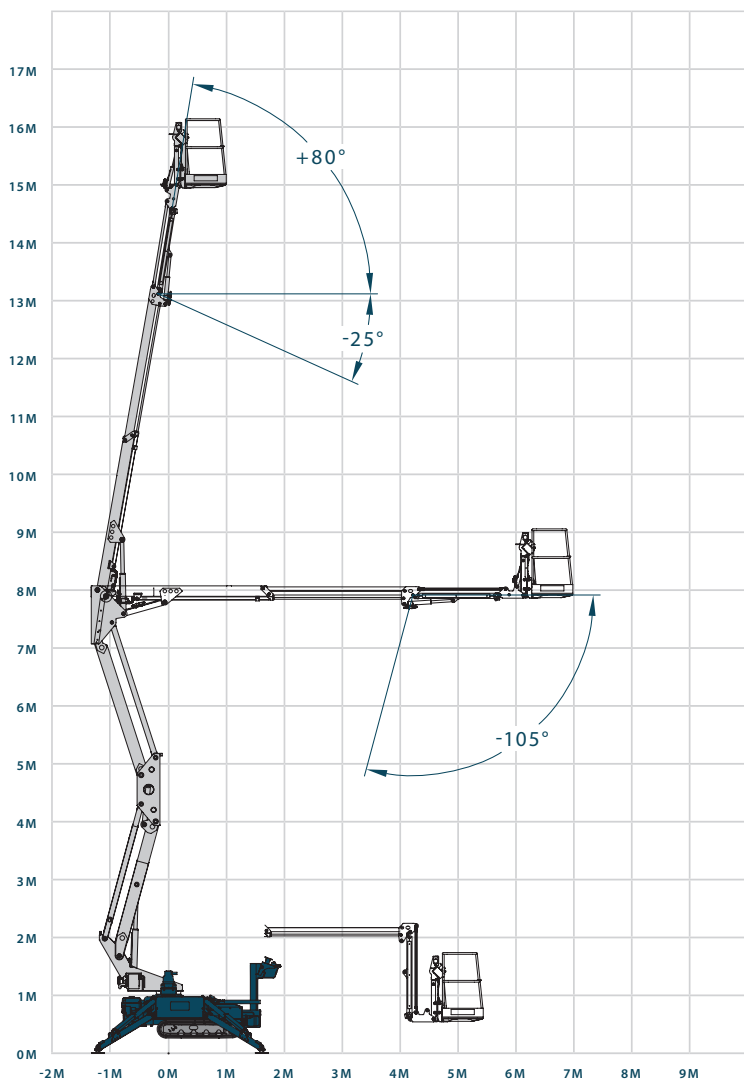

SAFETY REQ.



TRANSPORT REQ.



Spider

TRACESS170  
SPIDER

95


	MINI CRAWLER CRANE MC285C-2
CRANE CAPACITY	2820kg x 1.40m
MAXIMUM WORKING RADIUS	8.205m x 150kg
MAXIMUM LIFTING HEIGHT (ON THE GROUND)	8.70m
MAXIMUM LIFTING HEIGHT (UNDERGROUND)	-10.1m (4 falls)
BOOM LENGTH	2.535m - 8.575m
OVERALL LENGTH	3.32m
OVERALL WIDTH	0.75m
OVERALL HEIGHT	1.47m
GROSS WEIGHT	1960kg
FUEL	Diesel



## MINI CRAWLER CRANE MC285C-2

RATED TOTAL LOAD CHART WITH OUTRIGGER EXTENDED TO MAXIMUM			
2.535M / 4.075M BOOM		5.575M BOOM	
WORKING RADIUS (M)	RATED TOTAL LOAD (KG)	WORKING RADIUS (M)	RATED TOTAL LOAD (KG)
1.4 or less	2820	3.0 or less	1220
1.5	2520	3.5	970
2.0	1920	4.0	780
2.5	1570	4.5	630
3.0	1220	5.0	530
3.5	970	5.205	530
3.705	920		
7.075M BOOM		8.575M BOOM	
WORKING RADIUS (M)	RATED TOTAL LOAD (KG)	WORKING RADIUS (M)	RATED TOTAL LOAD (KG)
3.6 or less	820	4.0 or less	550
4.0	740	4.5	400
4.5	580	5.0	340
5.0	480	5.5	300
5.5	430	6.0	270
6.0	380	6.5	230
6.5	350	7.0	200
6.705	330	7.5	180
		8.0	150
		8.205	150

RATED TOTAL LOAD CHART WITH OUTRIGGER EXTENDED TO OTHER THAN MAXIMUM			
2.535M / 4.075M BOOM		5.575M BOOM	
WORKING RADIUS (M)	RATED TOTAL LOAD (KG)	WORKING RADIUS (M)	RATED TOTAL LOAD (KG)
1.5 or less	1720	3.0 or less	510
2.0	1070	3.5	410
2.5	630	4.0	330
3.0	520	4.5	280
3.5	390	5.0	200
3.705	350	5.205	200
7.075M BOOM		8.575M BOOM	
WORKING RADIUS (M)	RATED TOTAL LOAD (KG)	WORKING RADIUS (M)	RATED TOTAL LOAD (KG)
3.6 or less	400	4.0 or less	330
4.0	330	4.5	280
4.5	280	5.0	230
5.0	230	5.5	180
5.5	180	6.0	160
6.0	160	6.5	130
6.5	130	7.0	100
6.705	120	7.5	80
		8.0	70
		8.205	60

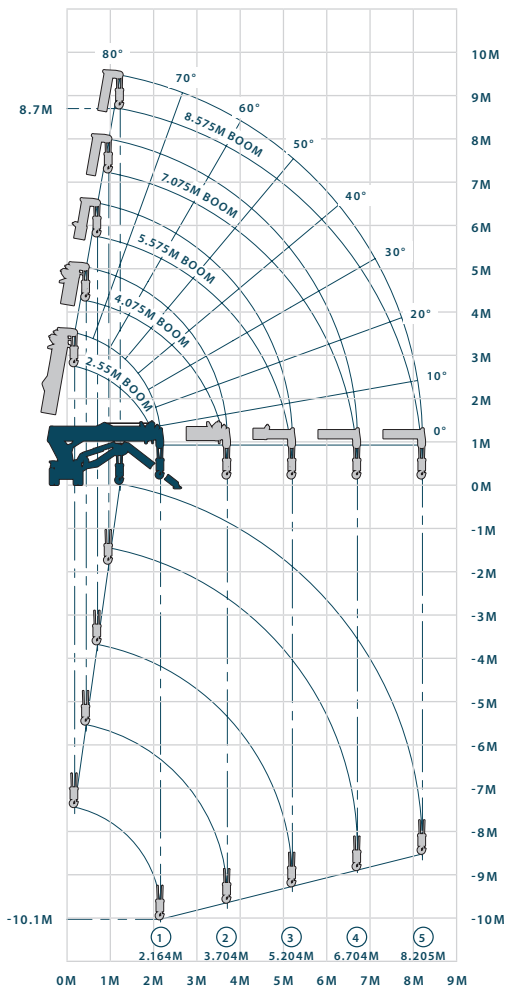

- \* The Rated Total Load Chart is based on actual working radius including boom deflection.
- \* The weight of hook block (standard 4 fall / 2 fall-30kg) must be included as part of the load shown in the Rated Total Load Chart.
- \* When using two falls hook or single fall hook, use the appropriate four falls Rated Total Load Chart shown above but with a maximum load of: -1410kg for two falls and -710kg for Single fall.

### SAFETY REQ.



\*



### TRANSPORT REQ.

Mini Crawler Crane

MC285C-2

\* OPERATOR LICENSE MAYBE REQUIRED DEPENDING ON USAGE







# If you need manoeuvrability...

The Telehandler is a versatile machine predominantly used to move materials around building sites. This makes them perfect for building and construction sites and farms, where they will increase efficiency by reducing labour requirements.

This machine is unbeatable for manoeuvrability; it has an extremely tight turning circle and three different steering modes making it possible to position the machine accurately for best reach. Steering modes include: front or two wheel steer, round or four wheel steer and crab steer.

Our Telehandlers are powered by a four cylinder Deutz turbo-charged diesel engine, perfectly suited for driving the machine in all conditions. Additional stabilisation can be added using optional outriggers which also significantly increase the load capacity at maximum reach.

Adding to this machines versatility; fork, bucket and crane extensions are also available.

*Machine availability and specifications  
do vary between regions. Please  
contact your local branch for  
more information.*



# FORKWORX

a division of accessman



Telehandlers

	HAULOTTE HTL3510
MAXIMUM LIFT CAPACITY	3500kg
MAXIMUM LIFT HEIGHT	9.8m
MAXIMUM REACH BELOW GRADE	2.2m
MAXIMUM FORWARD REACH	7.2m
OVERALL LENGTH	4.96m
OVERALL WIDTH	2.26m
OVERALL HEIGHT	2.42m
WHEELBASE	2.78m
GRINDER CLEARANCE	42cm
WEIGHT (WITH FORKS)	8610kg

## SAFETY REQ.



\*

## TRANSPORT REQ.



\* HEAVY WHEELS LICENSE IS REQUIRED IF DRIVEN ON ROAD



HAULOTTE HTL3510

	HAULOTTE HTL4010	HAULOTTE HTL4017
MAXIMUM LIFT CAPACITY	4000kg	4000kg
MAXIMUM LIFT HEIGHT	10.00m	16.7m
MAXIMUM REACH BELOW GRADE	2.20m	2.4m
MAXIMUM FORWARD REACH	7.20m	12.85m
OVERALL LENGTH	4.96m	6.76m
OVERALL WIDTH	2.26m	2.43m
OVERALL HEIGHT	2.42m	2.67m
WHEELBASE	2.78m	2.9m
GRINDER CLEARANCE	42cm	50cm
WEIGHT (WITHOUT FORKS)	8740kg	12000kg

## SAFETY REQ.



\* HEAVY WHEELS LICENSE IS REQUIRED IF DRIVEN ON ROAD

## TRANSPORT REQ.



# accessman training

In 2015 Accessman was one of the two companies to become an accredited IPAF training centre and bring the internationally recognised training into New Zealand.



**Approved  
Training Centre**

Leading industry professionals developed the IPAF training, which is delivered by a worldwide network of over 600 training centres to more than 100,000 operators each year.

Some “need to know” about IPAF’s PAL (Powered Access License) card:

- PAL card is ISO18878 and ISO9001 accredited. This is an international standard that covers Mobile elevated work platform operator training
- International recognition of training, both in terms of staff holding a card that arrive into NZ, and for staff that are trained here, and want to take the card with them internationally
- Cards can be instantly verified via an online database, that not only includes a photo of the holder, but details down where, when the card expires, and what types of machines can be operated
- Ability to choose categories that match requirements of individual and company
- Internationally accredited training instructors
- Includes candidate log book for recording of machine use
- A card and certificate are issued
- An operator handbook is included
- Alignment to all machine manufacturers, who are also members of IPAF
- Accessman is the only South Island based, Internationally recognised and accredited training provider
- WorkSafe NZ has acknowledged the new IPAF training programme with WorkSafe inspectors briefed about the programme
- Class sizes are kept small to maximise individual learning and comprise both practical and theory based learning with assessments
- IPAF training centres are regularly audited to ensure they meet and adhere to the IPAF standards. Training centre’s also receive regular updates to ensure that you are receiving the best training possible
- IPAF PAL card is valid for 3 years in NZ and 5 years internationally

E-learning is a 2016 initiative from IPAF, with modules emailed to operators to carry out the theory side of their training from home. They can then proceed to the training centre for their theory examination, practical training and practical examination. This is a great platform to be able to learn at your own pace, in your own home or office.

*IPAF training is certified by TÜV as conforming to the international standard ISO 18878 Mobile elevating work platforms – Operator (driver) training and ISO 9001 - Quality Management Systems.*

---

## **SILVERCARD™**

The HIANZ (Hire Industry Association of New Zealand Inc) EWP Silver Card course was re-developed to meet the requirements of the Best Practice Guidelines for Mobile Elevating Work Platforms (Released August 2014). The course is comprised of both practical and theory based learning complete with assessments. The classes are kept small to maximize individual learning.

Through the Skills ITO the course is based on an NZQA standard for EWP. Learners are enrolled with Skills and results are reported by Skills. Upon completion of the course, training records are submitted and you will be presented with your Silvercard.

All of our trainers are Skills registered assessors.

We offer courses on Scissorlift, Boom Lift (Knuckleboom and Telescopic Boom), Trailer Mounted (Cherry Picker), Vertical Lift (Mast Lift) and Truck Mounted Boom (at special request).

Refresher courses are also available upon request.

- 1 machine - 1/2 day duration
- 2 machines - 1 day duration
- 3 machines - 1 1/2 day duration

**FOR MORE INFORMATION OR TO  
BOOK YOUR COURSE, CONTACT US  
AT [training@accessman.co.nz](mailto:training@accessman.co.nz)  
OR CALL ON (03) 341 3570**

*Accessman  
conducts EWP  
Operator Training  
in 6 centres  
nationwide!*

*EWP Operator Training*

**HIANZ  
SILVERCARD**



Now available  
for hire!

**accessman**   
MAKING HEIGHT EASY  
*and coffee fixes*

For all your  
private functions,  
work site and  
office shouts!

021 361 674  
[coffee@accessman.co.nz](mailto:coffee@accessman.co.nz)

[www.accessman.co.nz](http://www.accessman.co.nz)



0800 2GET HIGH

[www.accessman.co.nz](http://www.accessman.co.nz)

### North Shore

14 Parkhead Place Rosedale  
09 666 0778  
northshore@accessman.co.nz

### West Auckland

Unit 2/15 Copsey Place Avondale  
09 390 7959  
westakl@accessman.co.nz

### South Auckland

10 Golden Arches Place Wiri  
09 390 1060  
southakl@accessman.co.nz

### Waikato

29 Kaimiro Street Pukete Hamilton  
07 444 4353  
waikato@accessman.co.nz

### Blenheim

7 Sutherland Terrace Blenheim  
03 578 5600  
blenheim@accessman.co.nz

### Christchurch

2 Alloy Street Sockburn  
03 343 7560  
christchurch@accessman.co.nz

### Christchurch City

95 Ferry Road Christchurch Central  
03 377 8000  
city@accessman.co.nz

### Forkworx

021 361 226  
forkworx@accessman.co.nz

### Timaru

88 Meadows Road Washdyke  
03 688 7100  
timaru@accessman.co.nz

### Lakes

8 Cemetery Road Cromwell  
03 445 8020  
lakes@accessman.co.nz

### Otago

8 Wharf Street Dunedin  
03 477 1772  
dunedin@accessman.co.nz

### EWP Operator Training

03 341 3570  
training@accessman.co.nz

0800 2GET HIGH

[www.accessman.co.nz](http://www.accessman.co.nz)