

product guide











Contents

Mast Cirts & Pusii Arounds	
Electric Scissor Lifts	II
3-4 Metre Electric Scissor Lifts	12
6 Metre Electric Scissor Lifts	14
8 Metre Electric Scissor Lifts	16
10 Metre Electric Scissor Lifts	19
10-12 Metre Diesel Scissor Lifts	20
12 Metre Electric Scissor Lifts	21
14 Metre Electric Scissor Lifts	23
Rough Terrain Scissor Lifts	25
6-8 Metre Rough Terrain Scissor Lifts	26
8 Metre Rough Terrain Scissor Lifts	27
9 Metre Rough Terrain Scissor Lifts	28
10 Metre Rough Terrain Scissor Lifts	29
12 Metre Rough Terrain Scissor Lifts	32
18 Metre Rough Terrain Scissor Lifts	34
18-20 Metre Rough Terrain Scissor Lifts	35
Cherry Pickers	37
12 Metre Cherry Pickers	38
13 Metre Cherry Pickers	42
16 Metre Cherry Pickers	44
17 Metre Cherry Pickers	46
Knucklebooms	49
12 Metre Knucklebooms - Electric	50
12 Metre Knucklebooms - Diesel & Flectric	54











Contents continued ...

 	12 Metre Knucklebooms - Diesel	56
	15 Metre Knucklebooms - Electric	58
	16 Metre Knucklebooms - Electric	62
0 0	16 Metre Knucklebooms - Diesel	66
	17 Metre Knucklebooms - Diesel & Electric	70
	18 Metre Knucklebooms - Diesel	72
	18 Metre Knucklebooms - Diesel/Electric	76
	21 Metre Knucklebooms - Diesel & Electric	78
0	21 Metre Knucklebooms - Diesel	80
	20-21 Metre Knucklebooms - Electric	82
	21 Metre Knucklebooms - Bi Energy	84
	22 Metre Knucklebooms - Diesel	86
	26 Metre Knucklebooms - Diesel	88
0 0	28 Metre Knucklebooms - Diesel & Electric	90
	32 Metre Knucklebooms - Diesel	92
	41 Metre Knucklebooms - Diesel	94
	Telescopic Booms	97
0 0	23 Metre Telescopic Booms	98
	Specialised Machinery	IO
	Traccess170 Spider Lift	102
	Telehandlers	IO5
	Coffee Can	IOS

Vision Statement

The fundamental basis of the Accessman brand, is that of a company based on integrity, reliability and a level of service that is second to none, whilst also ensuring that opportunities are being provided for our staff, commonly referred to as the "A Team".

These principles remain today as we sustain continued growth across the markets we operate within Nationwide

Safety and innovation continue to be at the forefront of our next growth phase, while also encompassing a more "sustainable" vision in all areas of our operations.

Our ability to not only maintain our presence, but strengthen it, comes with the knowledge that timing is everything. Having the foresight to meet the market and diversify when required, provides clients the reassurance that Accessman will always deliver.

"Success is about creating benefit for all, and enjoying the process".

LENA HARRINGTON, GROUP GENERAL MANAGER

The Accessman Group now has a fleet in excess of over 1200 machines, making Accessman one of the largest specialised access hire companies in New Zealand.



Need accredited training?



Accessman takes safety so seriously that they have their own accredited training centres offering EWP operator training from the International Powered Access Federation (IPAF) and HIANZ.

For further information on any of our training courses IPAF or Silvercard, please email training@accessman.co.nz or alternatively visit our website www.accessman.co.nz.

SILV=RCARD



The HIANZ (Hire Industry Association of New Zealand Inc) EWP Silver Card course was redeveloped to meet the requirements of the Best Practice Guidelines for Mobile Elevating Work Platforms (Released August 2014). The course is comprised of both practical and theory based learning complete with assessments. The classes are kept small to maximize individual learning.

The Course is based on an NZQA standard for EWP. Upon completion of the course, training records are submitted and you will be provided a digital Silvercard, that can be accessed via the HIANZ App.

All of our trainers are IPAF or Silvercard registered assessors. We offer courses on Scissor Lift, Boom Lift, Trailer Mounted (Cherry Picker), Vertical Lift (Mast Lift). Refresher courses are also available upon request.

- 1 machine 1/2 day duration
- 2 machines 1 day duration
- 3 machines 1 1/2 day duration

For more information or to book your course, contact us at training@accessman.co.nz or call on (03) 341 3570



WHICH MACHINE IS right for you? Are you going straight up and down or do you need to reach up and over something? **UP & DOWN REACH OVER** Are you working inside Are you working in one spot for (flat surface) or outside long periods of time, or do you (rough ground)? need to drive once in the air? INSIDE **OUTSIDE ONE SPOT DRIVE AT HEIGHT**

CHERRY PICKER

ELECTRIC

SCISSOR LIFT

ROUGH TERRAIN

SCISSOR LIFT



5

KNUCKLEBOOM





The perfect machine for one-man jobs! These narrow machines are suited to indoor tasks that require only one operator in the basket for the purpose of going up and down.

They are battery powered keeping noise to a minimum, while ensuring that there are no diesel fumes . Non-marking tyres are standard to minimises the possibility of damage to indoor floor coverings, while a tight turning circle makes these machines incredibly manoeuvrable.

Vertical Personnel Lifts are available in various sizes. Certain models are compact and can be towed behind a suitable vehicle. For those that can't be towed, Accessman will deliver to and collect from your job site.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.

	DINGLI SPO39-E Push Around	DINGLI MV075 E Rizer	DINGLI MV075 RS Rizer
Working Height	5.80m	9.50m	9.50m
Platform Height	3.80m	7.50m	7.50m
Platform Size	1280 x 700mm	780 x 700mm	750 x 730mm
Platform Capacity	240kg	125kg	136kg
Overall Height	1920mm	1980mm	1990mm
Overall Width	760mm	820mm	800mm
Overall Length	1440mm	1400mm	1440mm
Gross Weight	425/530kg	1232kg/880kg	1535kg
Wind Rating	No	No	No
Fuel	Battery/ Push Around	Battery	Battery
Branch Availability	CH/CC/B/L/O/AK/W	CH/CC/W/L/O/AK	CH/CC/O/B









TRANSPORT REQ.









MV075 E

	HAULOTTE STAR 10	HAULOTTE STAR 10	DINGLI MV-095J Raptor
Working Height	10.00m (3m horizontal reach)	10.00m (3m horizontal reach)	11.20m (3m horizontal reach)
Platform Height	8.0m	8.0m	9.20m
Platform Size	780 x 980mm	780 x 980mm	870 x 620mm
Platform Capacity	200kg	200kg	200kg
Overall Height	1990mm	1990mm	1990mm
Overall Width	1.0m	1.0m	1.0m
Overall Length	2770mm	2770mm	2720mm
Gross Weight	2677kg	2677kg	2950kg
Wind Rating	Yes	Yes	Yes
Fuel	Battery	Battery	Battery
Branch Availability	CC/AK	CC/AK	CC/O/AK/CH










TRANSPORT REQ.







STAR 10 MV-095J

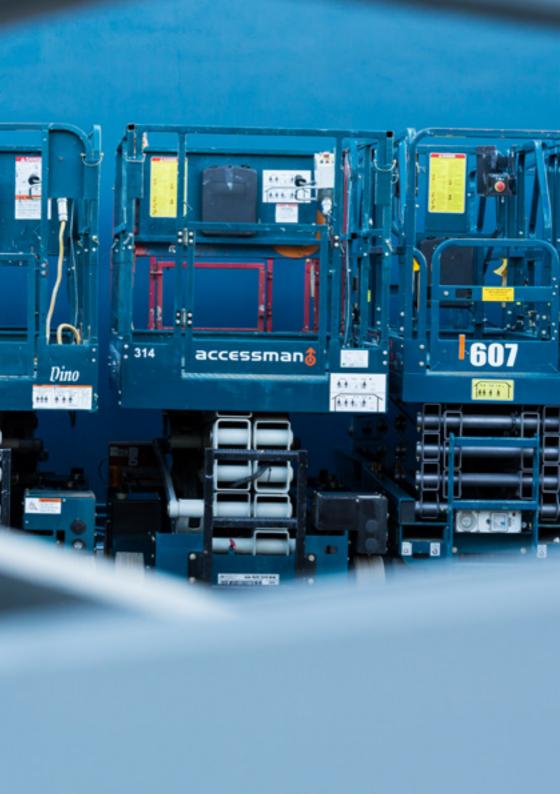



Need to work indoors at height?

If you need to work indoors at height, an Electric Scissor Lift is the machine for you.

They are compact to enable you to access tight areas or to manoeuvre between aisles and around other machinery, while battery power ensures there are no diesel fumes and minimal noise. They have a tight turning circle and **non-marking tyres** which minimises the possibility of damage to indoor floor coverings.

Electric Scissor Lifts are available in 3-metre, 4-metre, 6-metre, 8-metre, 10-metre, 12-metre and 14-metre varieties; providing height access for a range of situations. Additional versatility is provided via varying deck width options plus a roll-out deck extension that provides extra reach over objects.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.

	DINGLI S036-RS	GMG 1530-ED
Working Height	5.60m	6.50m
Platform Height	3.60m	4.50m
Platform Size	1290 x 700mm	1280 x 760mm
Platform Capacity	240kg	240kg
Platform Length (Extended)	1890mm	1800mm
Extension Capacity	100kg	100kg
Overall Height	2030mm	2030mm
Overall Height Stowed	1670mm	1590mm
Overall Width	760mm	760mm
Overall Length	1440mm	1690mm
Gross Weight	880kg	860kg
Wind Rating	Yes	No
Fuel	Battery	Battery
Branch Availability	CH/CC/B/L/O/AK	СН

Note: S036-RS is wind-rated for 2 people indoors and 1 person outdoors





	GMG 1930-ED	HAULOTTE 8.1 N Optimum
Working Height	7.60m	7.77m
Platform Height	5.70m	5.77m
Platform Size	1640 x 740mm	1720 x 740mm
Total Platform Capacity	230kg	230kg
Platform Length (Extended)	2550mm	2590mm
Extension Capacity	115kg	
Overall Height	2160mm	
Overall Height Stowed	1790mm	1980mm
Overall Width	760mm	790mm
Overall Length	1820mm	1900mm
Gross Weight	1430kg	1590kg
Wind Rating	Yes	Yes
Fuel	Battery	Battery
Branch Availability	CH/CC	В

Note: GMG machines have optional height sensors

SAFETY REQ.









TRANSPORT REQ.




* Harness if required by site/employer





GMG 1930-ED 8.1 N OPTIMUM

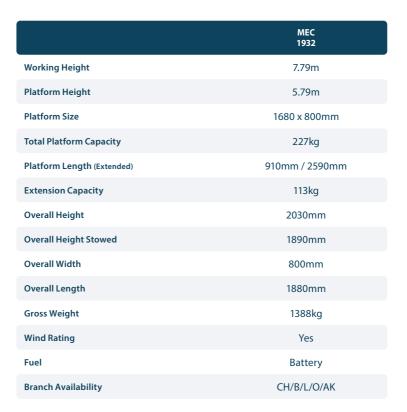









TRANSPORT REQ.







	DINGLI S06-E	DINGLI S06-ACE	LGMG S067E
Working Height	7.80m	7.80m	7.80m
Platform Height	5.80m	5.80m	5.80m
Platform Size	1670 x 740mm	1670 x 760mm	1640 x 730mm
Total Platform Capacity	230kg	230kg	230kg
Platform Length (Extended)	900mm/2570mm	900mm/2570mm	2540mm
Extension Capacity	113kg	113kg	120kg
Overall Height	2180mm	2150mm	2160mm
Overall Height Stowed	1840mm	1830mm	1810mm
Overall Width	760mm	760mm	790mm
Overall Length	1860mm	1860mm	1830mm
Gross Weight	1415kg	1630kg	1610kg
Wind Rating	Yes	Yes	Yes
Fuel	Battery	Battery	Battery
Branch Availability	CH/CC/B/L/O/AK	CC/AK/O/CH/B/L/W	CH/CC













TRANSPORT REQ.





S06-E S06-ACE S067E

	GMG 2632-ED Skinny	MEC2633 Skinny	MEC 2647
Working Height	9.80m	9.92m	9.92m
Platform Height	8.00m	7.92m	7.92m
Platform Size	2250 x 800mm	2310 x 840mm	2310 x 1190mm
Total Platform Capacity	227kg	227kg	454kg
Platform Length (Extended)	3240mm	3380mm	3390mm
Extension Capacity	113kg	113kg	113kg
Overall Height	2290mm	2190mm	2250mm
Overall Height Stowed	1800mm	2000mm	1780mm
Overall Width	800mm	840mm	1190mm
Overall Length	2450mm	2490mm	2510mm
Gross Weight	2205kg	2109kg	2404kg
Wind Rating	No	No	Yes
Fuel	Battery	Battery	Battery
Branch Availability	CH/CC	CH/B/L/AK	CH/O/AK









* Harness if required by site/employer

TRANSPORT REQ.









	DINGLI S0808E SKINNY	DINGLI S0808-ACE	HAULOTTE COMPACT 10N.1
Working Height	10.00m	10.00m	10.00m
Platform Height	8.00m	8.00m	8.00m
Platform Size	2270 x 810mm	2270 x 810mm	2300 x 810mm
Total Platform Capacity	230kg	230kg	230kg
Platform Length (Extended)	3170mm	900mm / 3170mm	3220mm
Extension Capacity	113kg	113kg	120kg
Overall Height	2320mm	2360mm	2180mm
Overall Height Stowed	1890mm	2000mm	1320mm
Overall Width	810mm	830mm	810mm
Overall Length	2480mm	2480mm	2490mm
Gross Weight	2180kg	2230kg	2190kg
Wind Rating	No	No	Yes
Fuel	Battery	Battery	Battery
Branch Availability	CH/CC/B/L/O/AK/W	CH/CC/L/O/W	B/W













* Harness if required by site/employer





S0808E SKINNY S0808-ACE COMPACT 10N.1

	DINGLI S0812E	DINGLI S0812E-ACE
Working Height	10.00m	10.00m
Platform Height	8.00m	8.00m
Platform Size	2270 x 1120mm	2270 x 1120mm
Total Platform Capacity	450kg	450kg
Platform Length (Extended)	3170mm	900mm / 3170mm
Extension Capacity	113kg	113kg
Overall Height	2320mm	2360mm
Overall Height Stowed	1780mm	1830mm
Overall Width	1150mm	1150mm
Overall Length	2480mm	2480mm
Gross Weight	2655kg	2710kg
Wind Rating	Yes	Yes
Fuel	Battery	Battery
Branch Availability	CC/L/W	CH/CC

















	MEC 3247	DINGLI S1012E
Working Height	11.75m	12.00m
Platform Height	9.75m	10.00m
Platform Size	2130 x 1190mm	2270 x 1120mm
Platform Capacity	318kg	320kg
Platform Length (Extended)	3390mm	3170mm
Extension Capacity	113kg	113kg
Overall Height	2420mm	2440mm
Overall Height Stowed	1940mm	1920mm
Overall Width	1190mm	1150mm
Overall Length	2510mm	2480mm
Gross Weight	2717kg	2695kg
Wind Rating	Yes	Yes
Fuel	Battery	Battery
Branch Availability	CH/L/O/AK	CC/O/WK/AK













* Harness if required by site/employer





MEC3247 S1012E

	LGMG SR1018D	SNORKEL S3970RT
Working Height	11.70m	13.80m
Platform Height	9.70m	11.80m
Platform Size	2790 x 1600mm	2800 x 1600mm
Total Platform Capacity	454kg	350kg
Platform Length (Extended)	4310mm	4000mm
Extension Capacity	140kg	
Overall Height	2550mm	2950mm
Overall Height Stowed	1890mm	2130mm
Overall Width	1600mm	1800mm
Overall Length	3760mm	3400mm
Gross Weight	4330kg	3790kg
Wind Rating	Yes	Yes
Fuel	Diesel	Diesel
Branch Availability	CH/CC/L	CC/B









TRANSPORT REQ.



	DINGLI S1212E	DINGLI S1212E-ACE
Working Height	13.8m	13.8m
Platform Height	11.8m	11.8m
Platform Size	2270 x 1120mm	2270 x 1120mm
Total Platform Capacity	320kg	320kg
Platform Length (Extended)	3170mm	-mm
Extension Capacity	113kg	113kg
Overall Height	2580mm	2620mm
Overall Height Stowed	2040mm	2090mm
Overall Width	1150mm	1190mm
Overall Length	2480mm	2480mm
Gross Weight	2910kg	2990kg
Wind Rating	No	No
Fuel	Battery	Battery
Branch Availability	CH/CC/B/L/O/AK/W	O/B













TRANSPORT REQ.





S1212E S1212 E ACE



	LGMG S1212E	GMG 4046-ED
Working Height	14.00m	14.04m
Platform Height	12.00m	12.04m
Platform Size	2260 x 1120mm	2310 x 1150mm
Platform Capacity	320kg	350kg
Platform Length (Extended)	3360mm	3320mm
Extension Capacity	120kg	120kg
Overall Height	2630mm	2520mm
Overall Height Stowed	1800mm	1960mm
Overall Width	1180mm	1150mm
Overall Length	2490mm	2460mm
Gross Weight	2970kg	3400kg
Wind Rating	No	No
Fuel	Battery	Battery
Branch Availability	CC	СН

Note: GMG machines have optional height sensors

SAFETY REQ.













TRANSPORT REQ.



S1212E GMG 4046-ED

	DINGLI S1412E	DINGLI S1412ACE	LGMG S1413E
Working Height	15.70m	15.70m	15.80m
Platform Height	13.70m	13.70m	13.80m
Platform Size	2640 x 1200mm	2640 x 1120mm	2640 x 1120mm
Total Platform Capacity	200kg	250kg	320kg
Platform Length (Extended)	3540mm	3540mm	3540mm
Extension Capacity	113kg	113kg	120kg
Overall Height	2580mm	2620mm	2470mm
Overall Height Stowed	2260mm	2090mm	1940mm
Overall Width	1250mm	1390mm	1300mm
Overall Length	2840mm	2840mm	2800mm
Gross Weight	3150kg	3380kg	3500kg
Wind Rating	No	No	No
Fuel	Battery	Battery	Battery
Branch Availability	CH/AK/WK/O/W	W	CC















TRANSPORT REQ.





S1412E S1412ACE S1413E





Need to work outdoors at height?

This machine is ideally suited to outdoor work; where uneven surfaces require additional stabilisation or where 4WD access is necessary; however with adequate ventilation they can also be used indoors. Electric rough terrains are also available. An articulating rear axle and hydraulic stabilizers on each corner of the machine provides a level working platform regardless of the terrain; while varying deck width options plus a roll-out deck extension ensures sufficient capacity for multiple workers and tools.

Rough Terrain Scissor Lifts are available in 8-metre, 9-metre, 10-metre, 12-metre, 18-metre and 20-metre varieties. Some models have an option of **non-marking tyres**. This machine can not be towed with a car, so Accessman will deliver and pick-up your Rough Terrain Scissor Lift, to and from your job site.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.

$\boldsymbol{+}$
1
_
•
>
.0
S
S.
7.
Ž
IU
·W
9
U
M
B
$\overline{}$
ú
LD.

	SNORKEL SR2255RT	SNORKEL S2755RT
Working Height	10.10m	10.10m
Platform Height	8.10m	8.10m
Platform Size	2730 x 1400mm	2730 x 1400mm
Total Platform Capacity	300kg	420kg
Platform Length (Extended)	1200mm / 3930mm	3930mm
Extension Capacity		
Overall Height	2350mm	2350mm
Overall Height Stowed	2130mm	2350mm
Overall Width	1450mm	1450mm
Overall Length	3300mm	3300mm
Gross Weight	2750kg	2410kg
Fuel	Diesel	Diesel
Branch Availability	CC/B	W









TRANSPORT REQ.



* Harness if required by site/employer

SRT2770 S2755RT **27**

	HAULOTTE 10DX	SNORKEL SRT2770
Working Height	10.28m	10.28m
Platform Height	8.28m	8.28m
Platform Size	2500 x 1450mm	2730 x 1650mm
Total Platform Capacity	565kg	580kg
Platform Length (Extended)	3700mm	3930mm
Extension Capacity	150kg	120kg
Overall Height	2440mm	2530mm
Overall Height Stowed	1590mm	1750mm
Overall Width	1780mm	1770mm
Overall Length	3170mm	3360mm
Gross Weight	3350kg	2886kg
Fuel	Diesel	Diesel
Branch Availability	CH/O/AK/L/W	СН

SAFETY REQ.



















	MEC 3084 RT SELF-LEVELLING SIGMA	MEC 3084 ES SELF-LEVELLING SIGMA
Working Height	11.00m	11.00m
Platform Height	9.00m	9.00m
Platform Size	4270 x 1830mm	4270 x 1830mm
Total Platform Capacity	680kg	680kg
Overall Height	2670mm	2670mm
Overall Height Stowed	1780mm	1780mm
Overall Width	2130mm	2130mm
Overall Length	4400mm	4400mm
Gradeability	45% / 24.2°	40% / 22°
Gross Weight	3400kg	3675kg
Fuel	Diesel	Battery
Branch Availability	CH/CC/AK/O/L	СН









TRANSPORT REQ.



* Harness if required by site/employer



	DINGLI SC1018 AWD
Working Height	12.00m
Platform Height	10.00m
Platform Size	2880 x 1520mm
Total Platform Capacity	454kg
Platform Length (Extended)	4310mm
Extension Capacity	136kg
Overall Height	2590mm
Overall Height Stowed	1820mm
Overall Width	1760mm
Overall Length	3840mm
Gross Weight	4300kg
Fuel	Diesel
Branch Availability	CC/AK/W/O

SAFETY REQ.









TRANSPORT REQ.



* Harness if required by site/employer





SC1018 AWD

	HAULOTTE 12DX	SNORKEL SR3370
Working Height	12.06m	12.12m
Platform Height	10.06m	10.12m
Platform Size	2500 x 1540mm	2730 x 1650mm
Total Platform Capacity	450kg	450kg
Platform Length (Extended)	3700mm	3930mm
Extension Capacity	150kg	120kg
Overall Height	2550mm	2700mm
Overall Height Stowed	1700mm	2000mm
Overall Width	1800mm	1770mm
Overall Length	3170mm	3360mm
Gross Weight	4060kg	3620kg
Fuel	Diesel	Diesel
Branch Availability	BL/AK/O/WK/CH/CC/L	O/B

SAFETY REQ.









TRANSPORT REQ.









	MEC 3772 ES	MEC 3772 RT	SKYJACK 6832 RT
Working Height	13.28m	13.28m	11.75m
Platform Height	11.28m	11.28m	9.75m
Platform Size	2790 x 1830mm	2790 x 1520mm	2440 x 1420mm
Total Platform Capacity	454kg	340kg	318kg
Platform Length (Extended)	4010mm	4010mm	1520mm/-mm
Extension Capacity	181kg	181kg	136kg
Overall Height	2710mm	2620mm	2510mm
Overall Height Stowed	1950mm	1880mm	1750mm
Overall Width	1830mm	1830mm	1760mm
Overall Length	2980mm	2980mm	3350mm
Gross Weight	3717kg	3589kg	3781kg
Fuel	Battery	Diesel	Battery
Branch Availability	CH/O/L/AK	CH/B/O/AK	B/W

SAFETY REQ.









* Harness if required by site/employer



TRANSPORT REQ.



3772 ES 3772 RT 6832 RT



SAFETY REQ.









TRANSPORT REQ.



* Harness if required by site/employer



	MEC 4069	MEC 4191
Working Height	14.20m	14.50m
Platform Height	12.20m	12.50m
Platform Size	3000 x 1500mm	3550 x 1800mm
Total Platform Capacity	360kg	454kg
Platform Length (Extended)	4220mm	4570mm
Extension Capacity	113kg	227kg
Overall Height	2550mm	3020mm
Overall Height Stowed	1980mm	2220mm
Overall Width	1750mm	2310mm
Overall Length	3200mm	3660mm
Gross Weight	4900kg	4670kg
Fuel	Diesel	Diesel
Branch Availability	CH/L	CH/AK

SAFETY REQ.















TRANSPORT REQ.



MEC4069 MEC4191

	DINGLI SL1623 AWD
Working Height	18.00m
Platform Height	16.00m
Maximum Drive Height	9.00m
Platform Size	3980 x 1830mm
Total Platform Capacity	680kg
Platform Length (Extended)	6570mm
Extension Capacity	227kg
Overall Height	3190mm
Overall Height Stowed	2490mm
Overall Width	2270mm
Overall Length	4880mm
Gross Weight	9190kg
Fuel	Diesel
Branch Availability	CH/B/O/AK

SAFETY REQ.

















	MEC 5492RT	MEC 6092RT
Working Height	18.50m	20.20m
Platform Height	16.50m	18.20m
Maximum Drive Height	10.70m	12.20m
Platform Size	5300 x 1930mm	5230 x 1900mm
Total Platform Capacity	680kg	540kg
Platform Length (Extended)	7540mm	7540mm
Extension Capacity	227kg	227kg
Overall Height	3150mm	3150mm
Overall Height Stowed	2380mm	2380mm
Overall Width	2340mm	1900mm
Overall Length	5300mm	5300mm
Gross Weight	8850kg	9300kg
Fuel	Diesel	Diesel
Branch Availability	СН	CH/AK

Note: Has a non-marking tyre option

SAFETY REQ.













* Harness if required by site/employer





MEC 5492RT MEC 6092RT





Need to work indoors and outdoors?

With unrivalled telescopic reach and bi-fuel capacity (both battery and petrol power options), Cherry Pickers are suitable for both indoor and outdoor jobs. They are versatile and able to access tight areas and are almost silent when operated by battery. Hydraulic stabilisers on each corner of the machine provides a level working platform regardless of the terrain while in-basket controls give workers full control to manoeuvre the working platform to where it is needed.

Accessman will provide you with a free harness to wear while working in the basket of the Cherry Picker as per national Health & Safety requirements.


Cherry Pickers are available for hire with a 12-metre, 13-metre, 16-metre and 17-metre reach. Your Cherry Picker can be delivered or you can tow the machine with a suitable vehicle.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.

	NIFTY 120T
Working Height	12.20m
Platform Height	10.20m
Platform Size	1100 x 650mm
Platform Capacity	200kg
Working Outreach	6.10m
Rotation Slew	360°
Overall Height Stowed	1900mm
Overall Width (Outriggers Retracted)	1500mm*
Overall Width (Outriggers Extended)	3550mm
Overall Length Stowed	4500mm
Gross Weight	1400kg
Fuel - Bi-Energy	Battery/Petrol
Branch Availability	В

^{*} This machine has the ability to be made narrower to be able to get through tighter gaps. Width 1100mm with axles retracted.



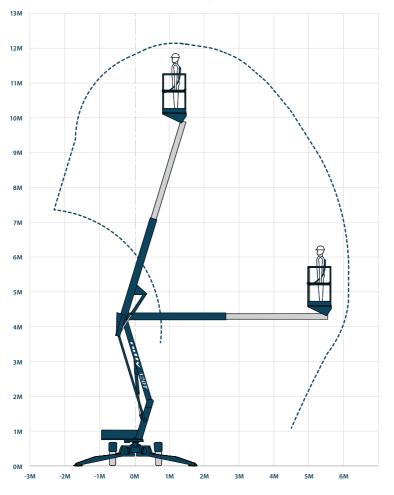

SAFETY REQ.














	SNORKEL MHP13-35
Working Height	12.60m
Platform Height	10.60m
Platform Size	1250 x 780mm
Platform Capacity	200kg
Working Outreach	5.60m
Rotation Slew	540° (non-continuous)
Overall Height Stowed	2050mm
Overall Width (Outriggers Retracted)	1580mm
Overall Width (Outriggers Extended)	3950mm
Overall Length Stowed	5990mm
Gross Weight	1360kg
Fuel - Bi-Energy	Petrol
Branch Availability	CC/CH



SNORKEL MHP13-35

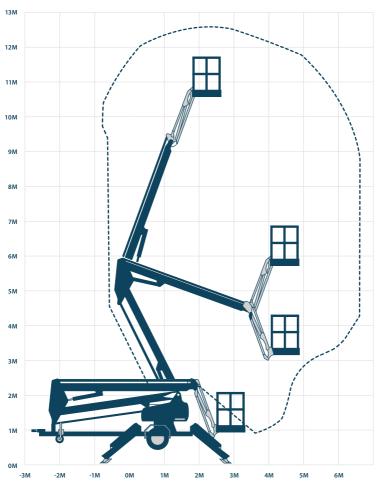

SAFETY REQ.










TRANSPORT REQ.




MHP13-35

2m Cherry Pickers

	HAULOTTE HTA13P	HAULOTTE HTA13P - OLDER MODEL
Working Height	13.30m	12.73m
Platform Height	11.30m	10.90m
Platform Size	1220 x 760mm	1220 x 760mm
Platform Capacity	227kg	227kg
Working Outreach	6900mm	6900mm
Rotation Slew	700° (non-continuous)	700° (non-continuous)
Overall Height Stowed	1950mm	1960mm
Overall Width (Outriggers Retracted)	1660mm	1660mm
Overall Width (Outriggers Extended)	3000mm	3400mm
Overall Length Stowed	4950mm	4950mm
Gross Weight	1542kg	1542kg
Fuel - Bi-Energy	Battery/Petrol	Battery/Petrol
Branch Availability	AK/WK	CC/B/L/O



HAULOTTE HTA13P

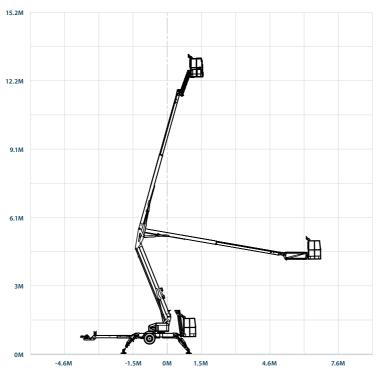

SAFETY REQ.









TRANSPORT REQ.




HTA13P

43

3m Cherry Pickers

	HAULOTTE HTA16P
Working Height	15.70m
Platform Height	13.70m
Platform Size	1220 x 760mm
Platform Capacity	227kg
Working Outreach	8.20m
Rotation Slew	700° (non-continuous)
Overall Height Stowed	1950mm
Overall Width (Outriggers Retracted)	1660mm
Overall Width (Outriggers Extended)	3800mm
Overall Length Stowed	5900mm
Gross Weight	1905kg
Fuel - Bi-Energy	Battery/Petrol
Branch Availability	CH/CC/O/AK/W

HAULOTTE HTA16P

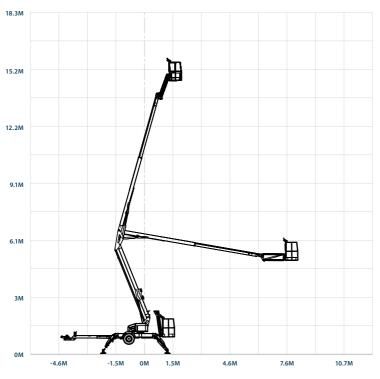

SAFETY REQ.









TRANSPORT REQ.




HTA13P 45

	NIFTY 170T
Working Height	17.10m
Platform Height	15.10m
Platform Size	1100 x 650mm
Platform Capacity	200kg
Working Outreach	8700mm
Rotation Slew	360°
Overall Height Stowed	2150mm
Overall Width (Outriggers Retracted)	1650mm
Overall Width (Outriggers Extended)	4400mm
Overall Length Stowed	6200mm
Gross Weight	1995kg
Fuel - Bi-Energy	Battery/Petrol
Branch Availability	В



NIFTY 170T

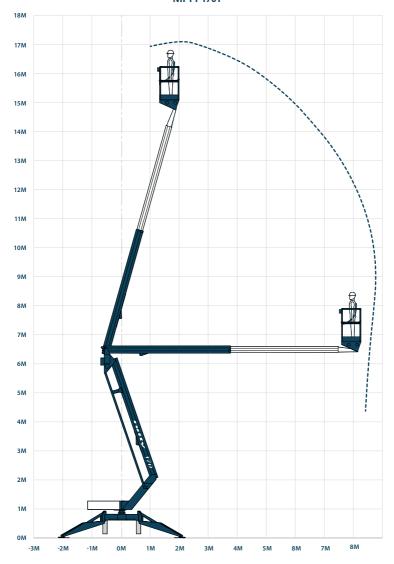

SAFETY REQ.















The perfect all-rounder, Knucklebooms allow you to be mobile while reaching up and over objects. They have exceptional reach via a telescopic upper boom; while in-basket controls provide accuracy when positioning the working platform.

Electric Knucklebooms are great for indoor use or outside on level ground. Some machines have non-marking tyres which minimises the possibility of damage to indoor floor coverings, while bi-fuel (battery and diesel power options) provides minimal noise and no diesel fumes. 4WD Knucklebooms can only be used outdoors (unless suitable indoor ventilation). Their all-wheel drive capabilities make them ideal for accessing work sites over rough terrain.

Knucklebooms can be driven while the basket is elevated, making this machine perfect for jobs where progress requires repositioning of the work platform.

Accessman will provide you with a free harness to wear while working in the basket of the knuckleboom as per national Health & Safety requirements.

Knucklebooms are available in 12 metre, 15 metre, 16 metre, 17 metre, 18 metre, 20 metre, 21 metre, 26 metre, 28 metre, 32 metre and 41 metre varieties. They can not be towed, so Accessman will deliver and pick-up your Knuckleboom to and from your job site.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.

Fuel
Branch Availability
Note: Has non-marking tyres

	HAULOTTE HA12 CJ+
Working Height	11.70m
Platform Height	9.70m
Platform Size	1150 x 800mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	7.22m
Rotation Slew	355∘
Overall Height Stowed	1990mm
Overall Width	1200mm
Overall Length	5640mm
Gross Weight	6970kg
Fuel	Battery
Branch Availability	В



HAULOTTE HA12 CJ+



SAFETY REQ.










TRANSPORT REQ.



HA12 CJ+ **51**

	GENIE SELF-PROPELLED Z-33/18
Working Height	12.00m
Platform Height	10.00m
Platform Size	1170 x 760mm
Platform Capacity	200kg
Platform Rotator	400° (non-continuous)
Horizontal Outreach	5570mm
Overall Height Stowed	1980mm
Overall Width	1500mm
Overall Length Stowed	4170mm
Gross Weight	3665kg
Fuel	Electric
Branch Availability	WK



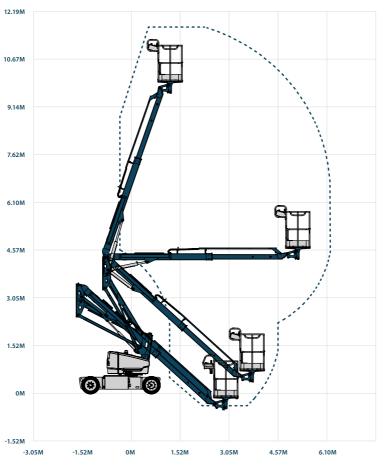

SAFETY REQ.









TRANSPORT REQ.



Z-33/18

NIFTY HR12 4WD
12.20m
10.20m
1100 x 650mm
200kg
NA
6100mm
360°
1950mm
1600m
4100mm
3470kg / 3330kg
Battery/Diesel

CH/CC/B/L/O/AK/WK


Note: Has a non-marking tyre option

Branch Availability



HR12 4WD

NIFTY HR12

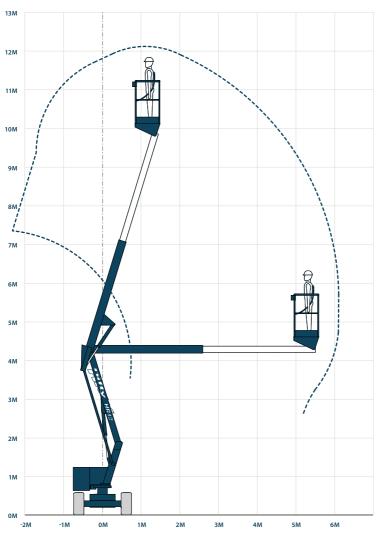

SAFETY REQ.












	HAULOTTE HA120PX
Working Height	12.40m
Platform Height	10.40m
Platform Size	1500 x 800mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	6600mm
Overall Height Stowed	2200mm
Overall Width	1900mm
Overall Length Stowed	5500mm
Gross Weight	5620kg
Fuel	Diesel
Branch Availability	AK/B/O



HA120PX **56**

HAULOTTE HA120PX

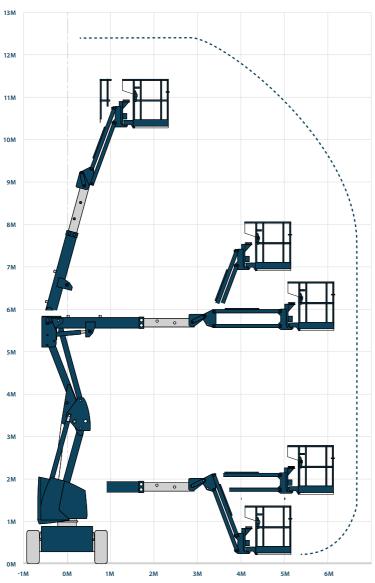

SAFETY REQ.









TRANSPORT REQ.




HA120PX **57**

Note: Has a non-marking tyre option



HAULOTTE HA15IP

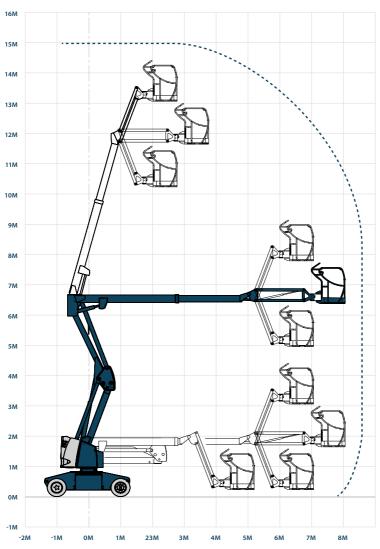

SAFETY REQ.









TRANSPORT REQ.




HA15IP **59**

	NIFTY HR15
Working Height	15.40m
Platform Height	13.40m
Platform Size	1500 x 700mm
Platform Capacity	225kg
Horizontal Outreach	9600mm
Overall Height Stowed	2100mm
Overall Width	1500mm
Overall Length	6300mm
Gross Weight	6623kg
Fuel	Battery
Branch Availability	СН



HR15 **60**

NIFTY HR15

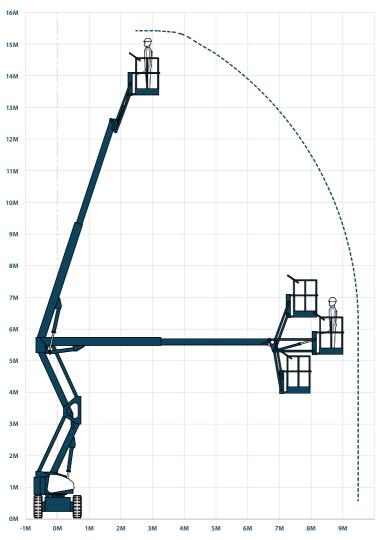

SAFETY REQ.












	GENIE Z-45/25J
Working Height	15.94m
Platform Height	13.95m
Platform Size	1830 x 760mm
Platform Capacity	227kg
Platform Rotator	Yes
Horizontal Outreach	7650mm
Rotation Slew	355° (non continuous)
Overall Height Stowed	2000mm
Overall Width	1790mm
Overall Length	6830mm
Gross Weight	7394kg
Tail Swing	Zero
Fuel	Electric
Branch Availability	WK



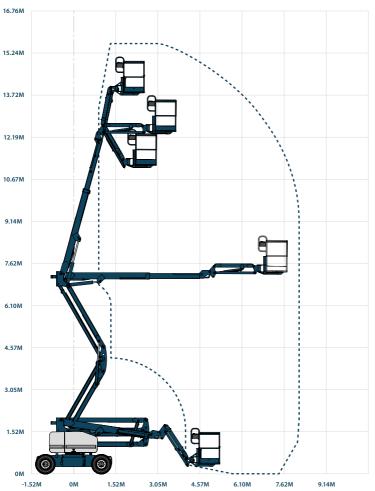

SAFETY REQ.












	DINGLI BA14J-E
Working Height	16.00m
Platform Height	14.00m
Platform Size	1450 x 760mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	9150mm
Rotation Slew	360° (non continuous)
Overall Height Stowed	2000mm
Overall Width	1730mm
Overall Length	6770mm
Gross Weight	6700kg
Tail Swing	Zero
Fuel	Electric
Branch Availability	AK

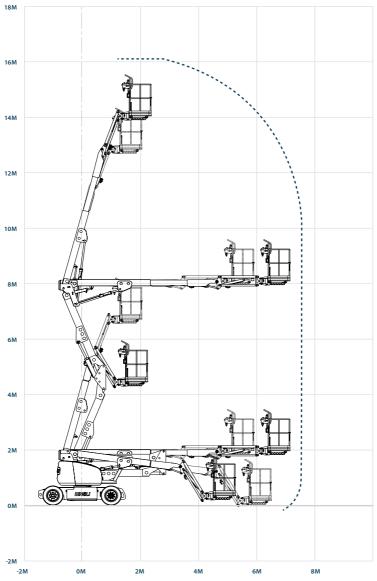

SAFETY REQ.









TRANSPORT REQ.




BA14J-E

	HAULOTTE HA16PX
Working Height	16.00m
Platform Height	14.00m
Platform Size	1800 x 800mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	9150mm
Rotation Slew	360° (non continuous)
Overall Height Stowed	2300mm
Overall Width	2300mm
Overall Length	6950mm
Gross Weight	6950kg
Tail Swing	Zero
Fuel	Diesel
Branch Availability	В



HAULOTTE HA16PX

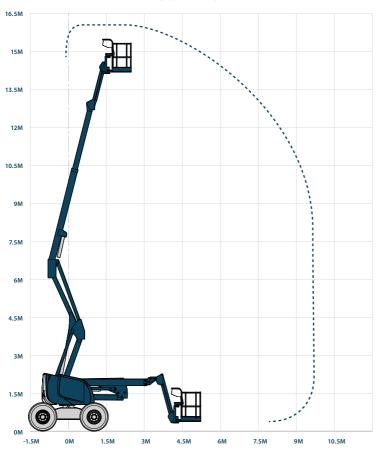

SAFETY REQ.









TRANSPORT REQ.




HA16PX

	HAULOTTE HA16RTJ PRO
Working Height	16.00m
Platform Height	14.00m
Platform Size	1830 x 800mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	8300mm
Rotation Slew	360°
Overall Height Stowed	2300mm
Overall Width	2300mm
Overall Length	6750mm
Gross Weight	6650kg
Tail Swing	Zero
Fuel	Diesel
Branch Availability	WK/B



HAULOTTE HA16RTJ PRO

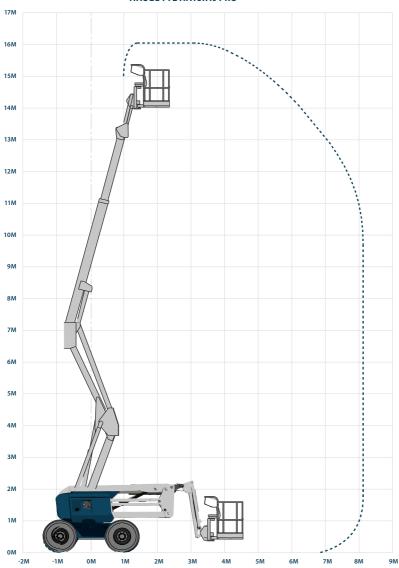

SAFETY REQ.









TRANSPORT REQ.




HA16RTJ PRO

	NIFTY HR17 Hybrid
Working Height	17.20m
Platform Height	15.20m
Platform Size	1800 x 850mm
Platform Capacity	225kg
Platform Rotator	Yes
Horizontal Outreach	9400mm
Rotation Slew	360° (non continuous)
Overall Height Stowed	2100mm
Overall Width	2000mm
Overall Length	6350mm
Gross Weight	5000kg
Tail Swing	Zero
Fuel	Battery/Diesel
Branch Availability	CH/AK

Note: Has a non-marking tyre option



NIFTY HR17 HYBRID

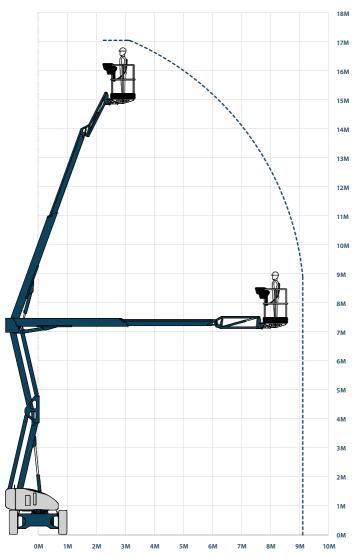

SAFETY REQ.









TRANSPORT REQ.




HR17 HYBRID


71

	HAULOTTE HA18PX
Working Height	17.30m
Platform Height	15.30m
Platform Size	1800 x 800mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	10.60m
Rotation Slew	360° (non continuous)
Overall Height Stowed	2300mm
Overall Width	2300mm
Overall Length	7600mm
Gross Weight	8050kg
Tail Swing	Zero
Fuel	Diesel
Branch Availability	CH/L/AK

Note: Has a non-marking tyre option



HAULOTTE HA18PX

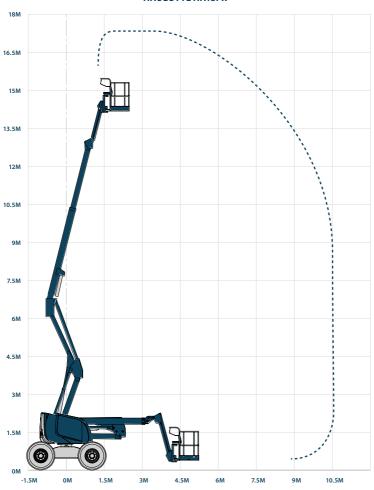

SAFETY REQ.









TRANSPORT REQ.



HA18PX 73

	GENIE Z-51/30J RT
Working Height	17.59m
Platform Height	15.59m
Platform Size	1830 x 760mm
Platform Capacity	227kg
Platform Rotator	Yes
Horizontal Outreach	9.37m
Rotation Slew	355° (non continuous)
Overall Height Stowed	2130mm
Overall Width	2290mm
Overall Length	7580mm
Gross Weight	7404kg
Tail Swing	Zero
Fuel	Diesel
Branch Availability	W

Note: Has a non-marking tyre option



GENIE Z-51/30J RT



SAFETY REQ.









TRANSPORT REQ.




Z-51/30J RT **75**

	DINGLI BA16J-AWD	DINGLI BA16J-E
Working Height	18.00m	18.00m
Platform Height	16.00m	16.00m
Platform Size	1800 x 760mm	1450 x 760mm
Platform Capacity	230kg	230kg
Platform Rotator	Yes	Yes
Horizontal Outreach	8850mm	8850mm
Rotation Slew	360° (continuous)	360° (continuous)
Overall Height Stowed	2330mm	2330mm
Overall Width	2300mm	2300mm
Overall Length	7590mm	7590mm
Gross Weight	7835kg	6975kg
Tail Swing	Zero	Zero
Fuel	Diesel	Electric
Branch Availability	CH/L/W/AK	AK



DINGLI BA16J-AWD

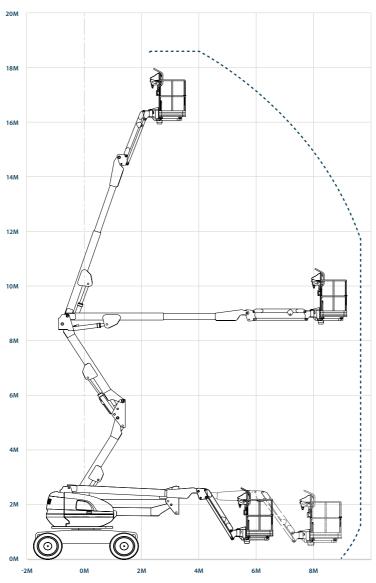

SAFETY REQ.









TRANSPORT REQ.



18m Deisel/Electric Kwcklebooms

BA16J-AWD BA16J-E

77


_
0
\sim
Ò
-
61
بعب
-
3
2
~
7
U
U
Ш
ПН
w
•
U
U
L.

	MEC 60JE	MEC 60JD
Working Height	20.10m	20.10m
Platform Height	18.30m	18.30m
Platform Size	2400 x 1000m	2400 x 1000m
Platform Capacity	227kg	227kg
Platform Rotator	Yes	Yes
Maximum Outreach	13m	13m
Overall Height Stowed	2480mm	2500mm
Overall Width	2450mm	2400mm
Overall Length Stowed	9300mm	9300mm
Gross Weight	8390kg	8119kg
Fuel	Battery	Diesel
Branch Availability	AK	AK

Note: MEC60JE has a non-marking tyre option





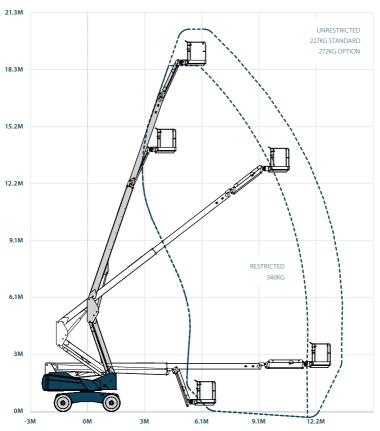

SAFETY REQ.









TRANSPORT REQ.



MEC60JE


	HAULOTTE HA20RTJ PRO
Working Height	20.60m
Platform Height	18.60m
Platform Size	1800 x 800mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	12.20m
Rotation Slew	360°
Overall Height Stowed	2510mm
Overall Width	2420mm
Overall Length	8800mm
Gross Weight	9600kg
Fuel	Diesel
Branch Availability	CH/AK/L/WK

Note: Has a non-marking tyre option



HA20RTJ PRO **80**

HAULOTTE HA20RTJ PRO

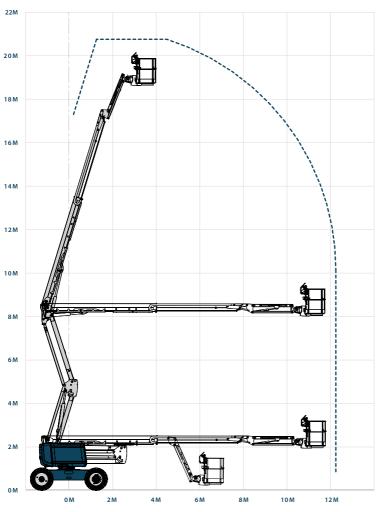

SAFETY REQ.









TRANSPORT REQ.



HA20RTJ PRO


81

	HAULOTTE HA20 LE PRO
Working Height	20.76m
Platform Height	18.76m
Platform Size	1830 x 800mm
Platform Capacity	250kg/350kg
Platform Rotator	180°
Horizontal Outreach	11.91m
Rotation Slew	360°
Overall Height Stowed	2500mm
Overall Width	2410mm
Overall Length	8540mm
Gross Weight	9785kg
Fuel	Battery
Branch Availability	СН

Note: Has a non-marking tyre option



HAULOTTE HA20 LE PRO

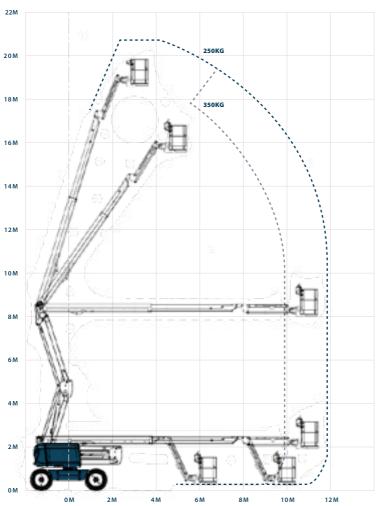

SAFETY REQ.









TRANSPORT REQ.




HA20 LE PRO

Note: Has a non-marking tyre option. Machines may vary between branches.



HR21 HR21 HYBRID

NIFTY HR21

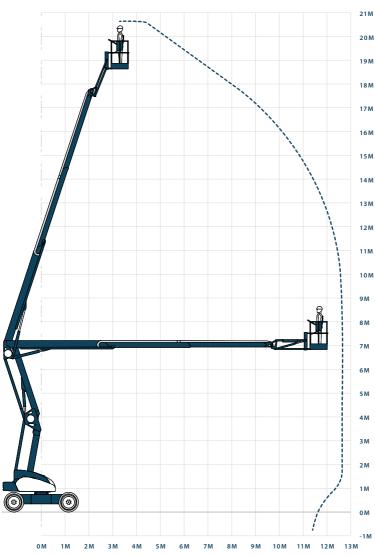

SAFETY REQ.










TRANSPORT REQ.



HR21 **HR21 HYBRID** 85

21m Bi Energy Knucklebooms

	DINGLI BA22RT
Working Height	22.21m
Platform Height	20.21m
Platform Size	1830 x 790mm
Platform Capacity	250kg
Horizontal Outreach	12.72m
Platform Rotator	Yes
Rotation Slew	360° (continuous)
Overall Height Stowed	2550mm
Overall Width	2330mm
Overall Length	9550mm
Gross Weight	9500kg
Fuel	Diesel
Branch Availability	AK

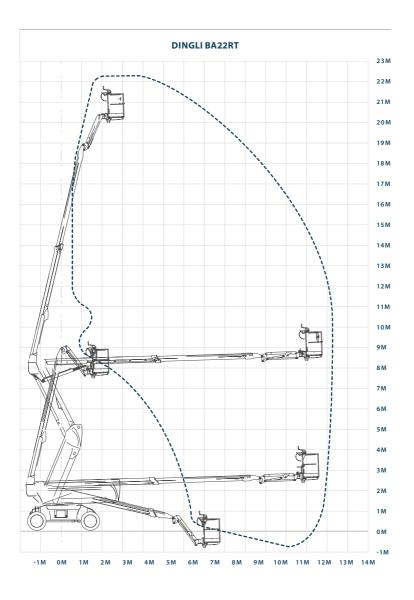

SAFETY REQ.









TRANSPORT REQ.



BA22RT

87


	HAULOTTE HA260PX	HAULOTTE HA26 RTJ PRO
Working Height	25.60m	26.40m
Platform Height	23.60m	24.40m
Platform Size	1800 x 800mm or 2440 x 800mm	2440 x 9110mm
Platform Capacity	230kg	250kg
Platform Rotator	Yes	Yes
Horizontal Outreach	16.20m	17.50m
Rotation Slew	360°	360°
Overall Height Stowed	2670mm	2970mm
Overall Width	2380mm	2480mm
Overall Length	12.00m	11.80m
Gross Weight	15950kg	15000kg
Fuel	Diesel	Diesel
Branch Availability	CH/O/AK	СН

Note: The HA260PX comes in 2 platform sizes (as above). Has a non-marking tyre option



HA260PX HA26 RTJ PRO

HAULOTTE HA260PX

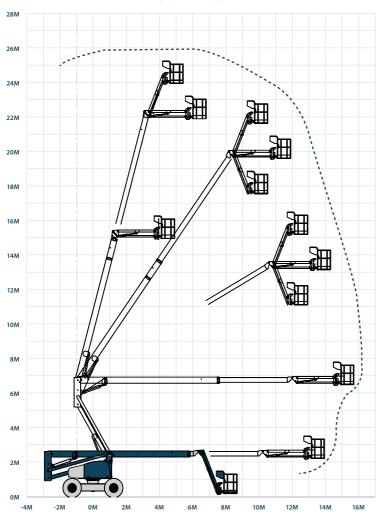

SAFETY REQ.









TRANSPORT REQ.



HA260PX HA26 RTJ PRO


26m Diesel Knucklebooms

	NIFTY HR28
Working Height	28.00m
Platform Height	26.00m
Platform Size	2400 x 900mm
Platform Capacity	280kg
Platform Rotator	Yes
Horizontal Outreach	19.00m
Rotation Slew	180°
Overall Height Stowed	2700mm
Overall Width	2490mm
Overall Length	9280mm
Gross Weight	14650kg
Fuel	Diesel/Battery
Branch Availability	СН

Note: Has a non-marking tyre option



NIFTY HR28

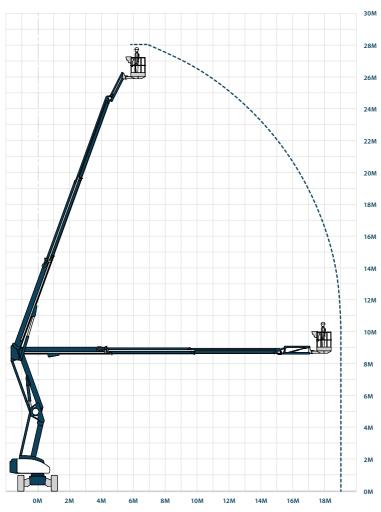

SAFETY REQ.









TRANSPORT REQ.




	HAULOTTE HA32PX
Working Height	31.80m
Platform Height	29.80m
Platform Size	2440 x 800mm
Platform Capacity	250kg
Platform Rotator	Yes
Horizontal Outreach	21.30m
Rotation Slew	360° (non continuous)
Overall Height Stowed	2700mm
Overall Width	2500mm
Width with Extended Axles	3330mm
Overall Length	11.16m
Gross Weight	21100kg
Fuel	Diesel
Branch Availability	AK/CH



HA32PX

HAULOTTE HA32PX

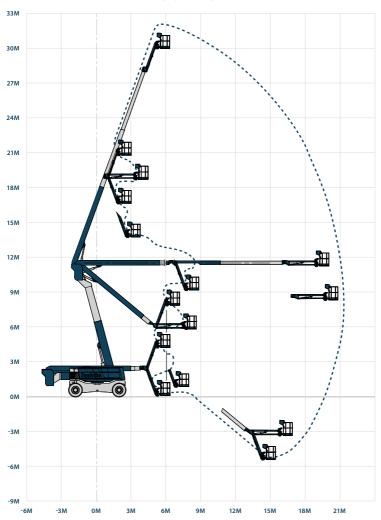

SAFETY REQ.









TRANSPORT REQ.




HA32PX **93**

	HAULOTTE HA41RTJ PRO
Working Height	41.50m
Platform Height	39.50m
Platform Size	2440 x 910mm
Platform Capacity	230kg
Platform Rotator	Yes
Horizontal Outreach	20.10m
Rotation Slew	360° (continuous)
Overall Height Stowed	2990mm
Overall Width	2500mm
Width with Extended Axles	3300mm
Overall Length	13.10m
Gross Weight	23900kg
Fuel	Diesel
Branch Availability	CH/AK



HA41RTJ PRO **94**

HAULOTTE HA41RTJ PRO

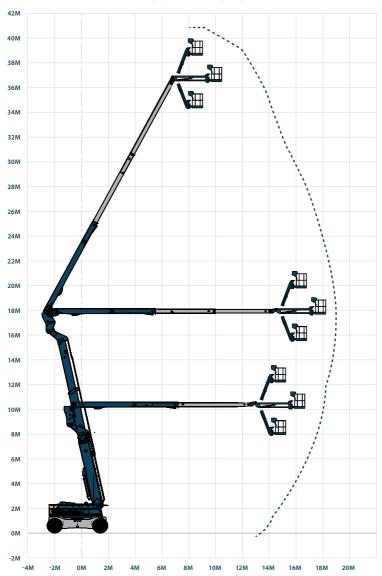

SAFETY REQ.









TRANSPORT REQ.



HA41RTJ PRO **95**





Do you need to work in a tight space where tail swing from a machine would be detrimental? Telescopic Booms have zero tail swing making them perfect for working in restrictive areas. These machines have excellent reach and are well suited to outdoor jobs on level ground.

Operators are given complete control from the basket; making precision manoeuvres easy. Accessman will provide you with a free harness to wear while working in the basket of the Telescopic Booms as national health and safety laws require this.

Telescopic Booms are available in 23-metre varieties.

4WD Telescopic Booms cannot be towed so Accessman will happily deliver and pickup your machine, to and from your job site.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.


	HAULOTTE H23TPX	HAULOTTE HT23RTJ PRO
Working Height	22.60m	22.50m
Platform Height	20.60m	20.50m
Platform Size	2440 x 910mm	2440 x 910mm
Platform Capacity	230kg	230kg
Platform Rotator	Yes	Yes
Horizontal Outreach	19.50m	18.30m
Rotation Slew	360° (continuous)	360° (continuous)
Overall Height Stowed	3.00m	2.70m
Overall Width	2470mm	2470mm
Overall Length	10.60m	10.40m
Gross Weight	13110kg	13400kg
Fuel	Diesel	Diesel
Branch Availability	СН	AK

 $\textbf{Note:} \ \textit{HT23RTJ Pro has 4 wheel steer capability. H23TPX has rear wheel steer.}$



H23TPX HT23RTJ PRO

HAULOTTE HT23

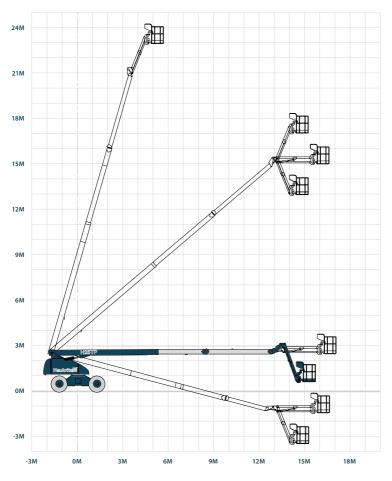

SAFETY REQ.









TRANSPORT REQ.



23m Telescopic Booms

H23TPX HT23RTJ PRO

99




Tracess 170 Spider

Nick named the Spider – this tracked machine has a bi-fuel engine, where it can run on 110V electricity or Petrol engine.


The tracked access platform is a unit with a very small base but a platform with a large cage and excellent working envelope. The cage can be readily removed to allow the unit to pass through a single standard doorway.

Offering 17m of working height and 7.5m of working outreach, 90 degree each way cage rotation, a light transit weight, and small footprint but at the same time a 200 kg payload throughout the whole working envelope.

	TRACESS170 Spider
Working Height	17.00m
Platform Size	1300 x 700mm
Platform Height	15.00m
Platform Capacity	200kg
Working Outreach	7.50m
Slew Rotation	330° (non continuous)
Overall Height Stowed	2.00m
Overall Width Stowed (Outriggers Retracted)	810mm
Overall Width Stowed (Outriggers Extended)	3160mm
Overall Length Stowed	4550mm
Gross Weight	2000kg
Fuel	Electric/Petrol
Branch Availability	AK/CH

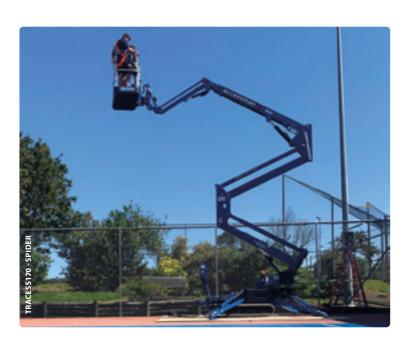

TRACESS170 - SPIDER

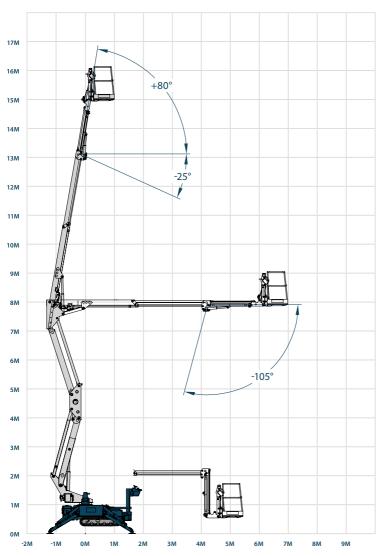

SAFETY REQ.









TRANSPORT REQ.





Tracked Boom Lift

TRACESS170 103





The Telehandler is a versatile machine predominantly used to move materials around building sites. This makes them perfect for building and construction sites and farms, where they will increase efficiency by reducing labour requirements.

This machine is unbeatable for manoeuvrability; it has an extremely tight turning circle and three different steering modes making it possible to position the machine accurately for best reach. Steering modes include: front or two wheel steer, round or four wheel steer and crab steer.

Our Telehandlers are powered by a four cylinder Deutz turbo-charged diesel engine, perfectly suited for driving the machine in all conditions. Additional stabilisation can be added using optional outriggers which also significantly increase the load capacity at maximum reach.

Adding to this machines versatility; fork, bucket and crane extensions are also available.

Machine availability and specifications do vary between regions. Please contact your local branch for more information.





	HAULOTTE HTL3510
Maximum Lift Capacity	3500kg
Maximum Lift Height	9.8m
Maximum Reach Below Grade	2.2m
Maximum Forward Reach	7.2m
Overall Length	4.96m
Overall Width	2.26m
Overall Height	2.42m
Wheelbase	2.78m
Grounder Clearance	42cm
Weight (With Forks)	8610kg
Branch Availability	Contact Local Branch

SAFETY REQ.









TRANSPORT REQ.







	HAULOTTE HTL4010	HAULOTTE HTL4017
Maximum Lift Capacity	4000kg	4000kg
Maximum Lift Height	10.00m	16.7m
Maximum Reach Below Grade	2.20m	2.4m
Maximum Forward Reach	7.20m	12.85m
Overall Length	4.96m	6.76m
Overall Width	2.26m	2.43m
Overall Height	2.42m	2.67m
Wheelbase	2.78m	2.9m
Grounder Clearance	42cm	50cm
Weight (Without Forks)	8740kg	12000kg
Branch Availability	Contact Local Branch	Contact Local Branch

SAFETY REQ.









* Heavy wheels license is required if driven on road

TRANSPORT REQ.









Now available for hire!

accessman (A)
MAKING HEIGHT, EASY

and coffee fixes

For all your private functions, work site and office shouts!

021 361 674 coffee@accessman.co.nz

www.accessman.co.nz



North Shore

14 Parkhead Place Rosedale 09 666 0778 northshore@accessman.co.nz

West Auckland

14 Parkhead Place Rosedale 09 390 7959 westakl@accessman.co.nz

South Auckland

10 Golden Arches Place Wiri 09 390 1060 southakl@accessman.co.nz

Waikato

29 Kaimiro Street Pukete Hamilton 07 444 4353 waikato@accessman.co.nz

Blenheim

7 Sutherland Terrace Blenheim 03 578 5600 blenheim@accessman.co.nz

Christchurch

2 Alloy Street Sockburn 03 343 7560 christchurch@accessman.co.nz



Christchurch City

95 Ferry Road Christchurch Central 03 377 8000 city@accessman.co.nz

Forkworx

021 361 226 forkworx@accessman.co.nz

Timaru/Ashburton

2 Alloy Street Sockburn 03 343 7560 christchurch@accessman.co.nz

Lakes/Queenstown

8 Cemetery Road Cromwell 03 445 8020 lakes@accessman.co.nz

Otago

8 Wharf Street Dunedin 03 477 1772 dunedin@accessman.co.nz

EWP Operator Training

03 341 3570 training@accessman.co.nz



O800 2GET HIGH